

VENTILATION SOLUTIONS


—
ERV / ERV WITH DX COIL



ERV


Necessity of ERV

Natural ventilation loss cooling, heating energy when exhausting polluted air inside. Heat exchanger in ERV collects the cooling, heating energy to save energy while supplying fresh air.

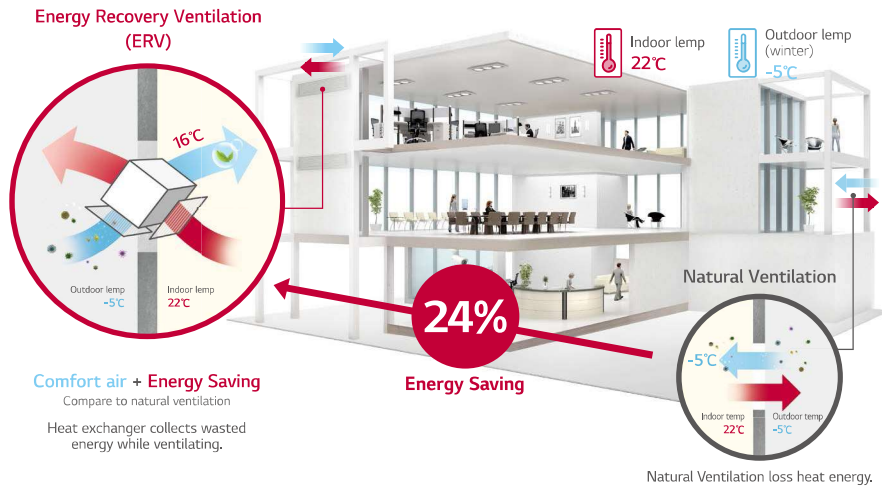


High Efficiency Heat Exchanger

Efficiency and comfort is ensured through the high-efficiency energy recovery central core which recovers energy from the indoor air and transfers it to the fresh incoming air without mixing airstream.

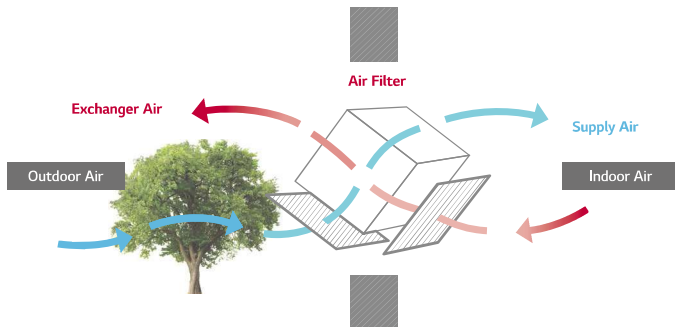


Interlocking with Air Conditioning System

- LG ERV can be interlocked with air conditioners and controlled individually.
- This function can be operated when the system is connected with a remote control

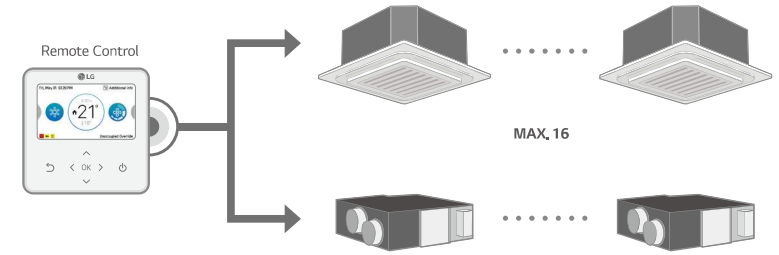

Compulsory Exhausting System


The exhausting system using high static and sirocco fan removes contaminants effectively from indoor air. Supply and exhaust air flows are completely separated in the total heat exchanger, LG ERV can filter out the impurities before supplying outdoor air and make indoor air fresh and healthy.

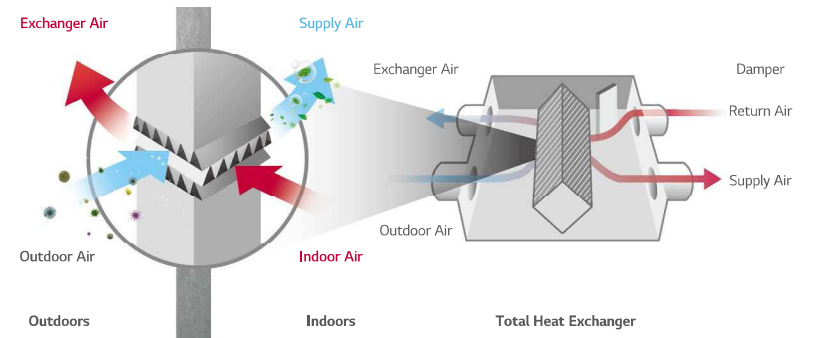

ERV

Night Time Free Cooling


Discharge the indoor heat in the summer night and supply cool outdoor air to indoors, so it can save energy.

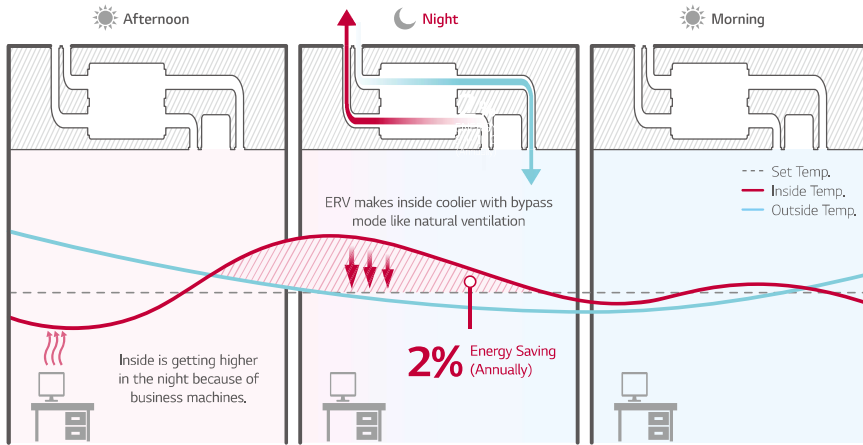

* This function is operated with 'Night Time Free Cooling' on remote controller, (with MULTI V only)
 ** Energy saving ratio can be differed by weather condition.
 ※ Test Condition
 - Office (49,000ft²) / Occupancy : 30 / Area : London, UK
 - ERV (1000 CMH) + MULTI V 4 (12HP) Unit Combination
 - Other conditions are subject to BREEAM.

Delay Operation


When you turn on the air conditioner and ERV at the same time, Delay Operation can reduce unnecessary heating and cooling energy loss slows down automatically ERV operation.

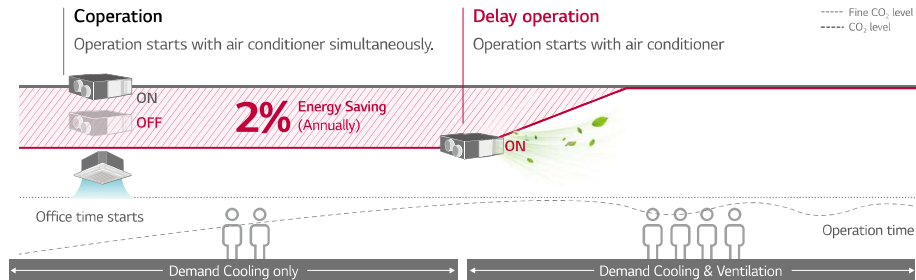

* This function is operated with 'Night Time Free Cooling' on remote controller, (with MULTI V only)
 ** Energy saving ratio can be differed by weather condition.
 ※ Test Condition
 - Office (49,000ft²) / Occupancy : 30 / Area : London, UK
 - ERV (1000 CMH) + MULTI V 4 (12HP) Unit Combination
 - Other conditions are subject to BREEAM.

CO₂ Auto Operation


LG ERV reduces energy loss with auto fan speed control following CO₂ level

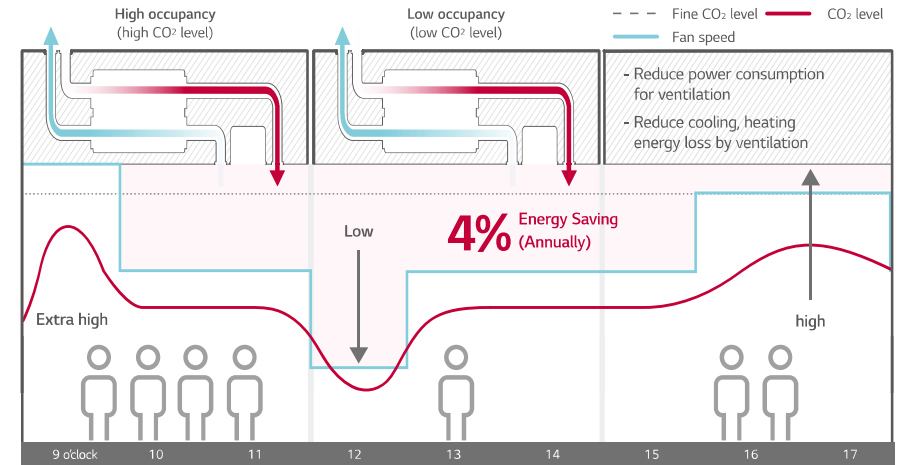

* This function is operated with 'Night Time Free Cooling' on remote controller, (with MULTI V only)
 ** Energy saving ratio can be differed by weather condition.
 ※ Test Condition
 - Office (49,000ft²) / Occupancy : 30 / Area : London, UK
 - ERV (1000 CMH) + MULTI V 4 (12HP) Unit Combination
 - Other conditions are subject to BREEAM.

Seasonal Auto Operation

LG ERV senses outdoor temperature and operates automatically following weather condition.

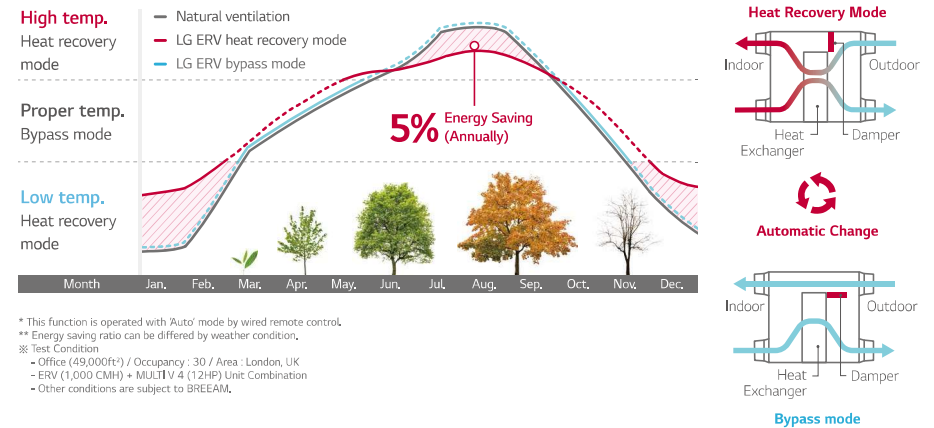

* This function is operated with 'Auto' mode by wired remote control.
 ** Energy saving ratio can be differed by weather condition.
 ※ Test Condition
 - Office (49,000ft²) / Occupancy : 30 / Area : London, UK
 - ERV (1,000 CMH) + MULTI V 4 (12HP) Unit Combination
 - Other conditions are subject to BREEAM.


ERV

CO₂ Level Monitoring

CO₂ sensor senses CO₂ level in the room. Users can monitor CO₂ level on new wired remote controller, and ERV controls the fan speed automatically following the level.

CO₂ Level Visualization

CO₂ sensor senses indoor CO₂ level and displays it on new wired remote controller.

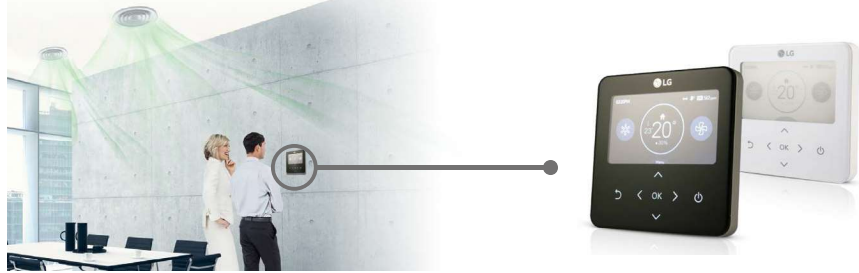

Main display


If the CO₂ level is above 900ppm in the room, the red mark is on.



* The remote controller screen image may change.
* Applicable to only Standard III, Premium remote controller.


Further information

CO₂ level and room condition are displayed continuously.

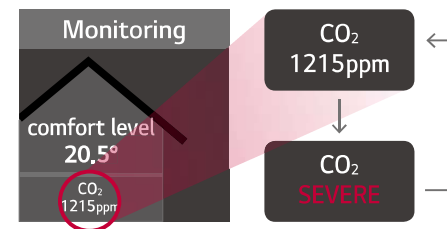

CO₂ Concentration Control

Using CO₂ sensor, LG ERV controls exhaust air flow automatically to keep indoor air fresh under settled CO₂ concentration.

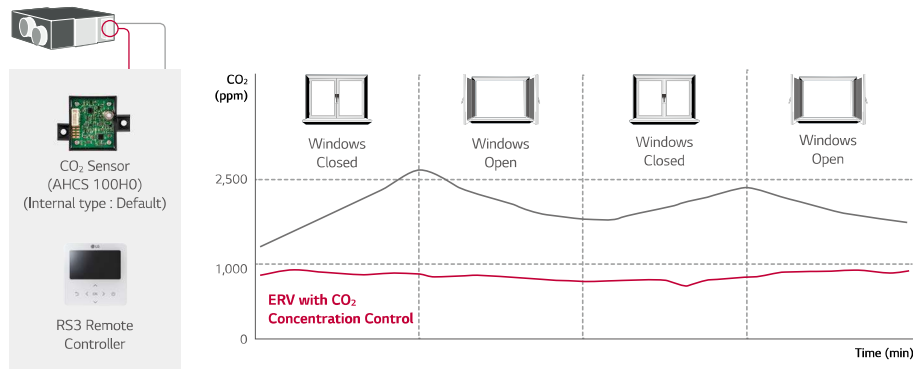


CO₂ Sensor (AHCS 100H0)
(Internal type : Default)

RS3 Remote Controller

External Static Pressure Control


The high static pressure fan can control the air volume depending on the length of the duct. It is also easy to control the pressure level by using the remote controller for a more flexible duct installation and easier testing.

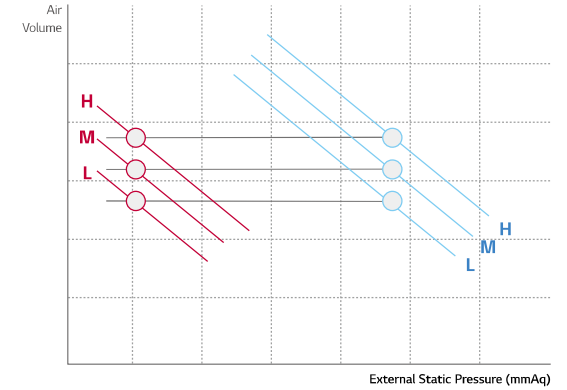

Fast Ventilation Mode


Fast ventilation mode prevents the spread of contaminants under negative indoor pressure, and makes indoor air fresh and comfortable quickly.

Only Exhausting

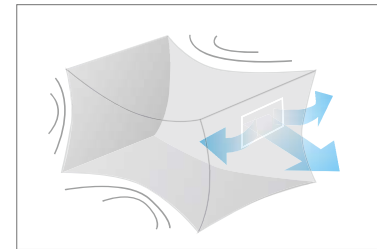

Exhausting operation causes negative indoor air pressure, and cannot fully ventilate.

Fast Ventilation Mode

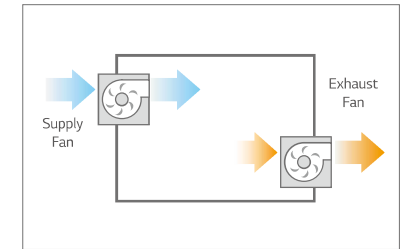


Exhausting and Supplying Simultaneously

ERV

High Durability

LG ERV durability is increased through bacteria-resistant material of heat exchanger and Corrosion protection coating. It prevents shortening product life due to corrosion and mold and supplies high quality air to inside by minimizing the bacteria.

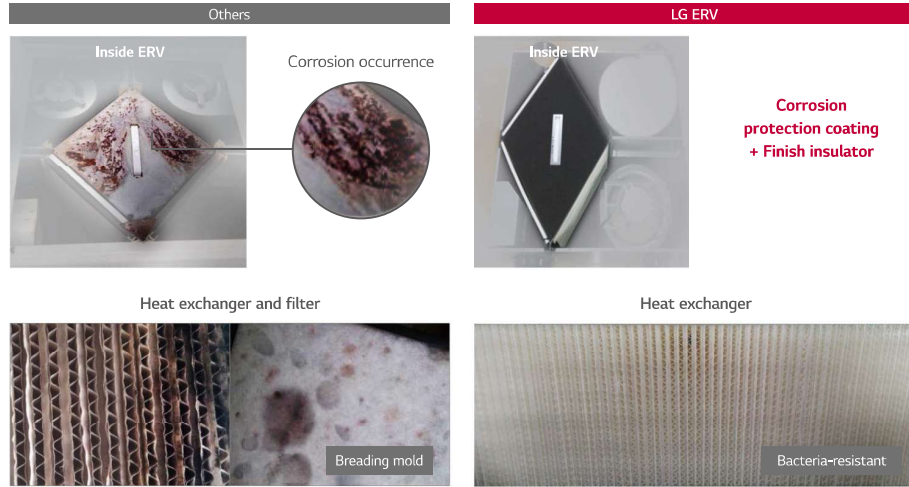

Easy Controller

Wired remote controller is easy for usage.




Easy

- Navigation buttons, easy to use.
- Easy installation setting



Convenient

- Flexible display
- Dual display with air conditioner.
- Zoom selected directory to increase legibility.



Visible

- Indoor CO₂ level
- Alarm for filter change / Remained time to change filters

Group Control

One wired remote control up to sixteen ERV (including air conditioning) You can reduce the remote installation costs and enjoy good looking interior wall effect.

Several units combination

16 units group control is available with 1 remote controller.



1) 16 units (including ERV, air conditioner) + 1 remote controller

Good looking interior




Controller & installation cost saving



Easy Cleaning and Filter Change

It is easy and convenient to change and clean the filter.

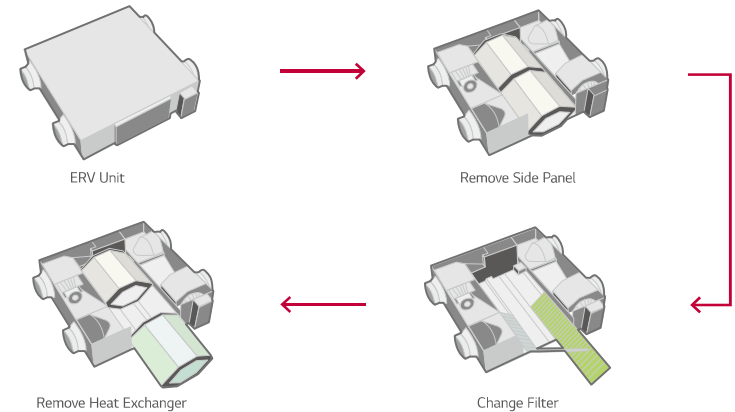

ERV

LZ-H025GBA4 / LZ-H035GBA4 / LZ-H050GBA4



Model		LZ-H025GBA4	LZ-H035GBA4	LZ-H050GBA4	
Nominal Capacity	CMH (CFM)	250 (147)	350 (206)	500 (294)	
Power Supply	Ø / V / Hz	1 / 220-240 / 50, 60			
ERV Mode	Step	SUPER-HIGH / HIGH / LOW			
	Current	SH / H / L	0,70 / 0,60 / 0,42	1,10 / 0,95 / 0,60	1,92 / 1,58 / 0,79
	Power Input	SH / H / L	97 / 78 / 52	180 / 163 / 88	240 / 220 / 90
	Air Flow	SH / H / L	250 / 250 / 150 (147 / 147 / 88)	350 / 350 / 210 (206 / 206 / 123)	500 / 500 / 320 (294 / 294 / 124)
	External Static Pressure	SH / H / L	100 / 70 / 50 (0,40 / 0,28 / 0,20)	150 / 130 / 100 (0,60 / 0,52 / 0,40)	150 / 100 / 50 (0,60 / 0,40 / 0,20)
	Temperature Exchange Efficiency	SH / H / L	80 / 80 / 83	75 / 75 / 77	78 / 78 / 79
	Enthalpy Exchange Efficiency	Heating (SH / H / L) %	70 / 70 / 72	68 / 68 / 70	73 / 73 / 75
		Cooling (SH / H / L) %	66 / 66 / 68	63 / 63 / 65	66 / 66 / 69
	Noise Level (Sound Level, 1,5m)	SH / H / L	29 / 28 / 24	32 / 30 / 27	34 / 32 / 25
	Bypass Mode	Step	SUPER-HIGH / HIGH / LOW		
Current		SH / H / L	0,70 / 0,60 / 0,42	1,10 / 0,95 / 0,60	1,92 / 1,58 / 0,79
Power Input		SH / H / L	97 / 78 / 52	180 / 163 / 88	240 / 220 / 90
Air Flow		SH / H / L	250 / 250 / 150 (147 / 147 / 88)	350 / 350 / 210 (206 / 206 / 123)	500 / 500 / 320 (294 / 294 / 124)
External Static Pressure		SH / H / L	100 / 70 / 50 (0,40 / 0,28 / 0,20)	150 / 130 / 100 (0,60 / 0,52 / 0,40)	150 / 100 / 50 (0,60 / 0,40 / 0,20)
Noise Level (Sound Level, 1,5m)		SH / H / L	29 / 29 / 25	32 / 30 / 27	35 / 33 / 25
Heat Exchanger		Type	Air to air cross flow heat exchange		
Net Weight		kg	44	44	44
Dimension		W x H x D	988 x 273 x 1,014	988 x 273 x 1,014	988 x 273 x 1,014
Duct work*		Qty	4		
	Size (Ø)	Ø200			
Supply Air Fan	Qty	1			
	Type	Direct-Drive (Sirocco Fan)			
Exhaust Air Fan	Qty	1			
	Type	Direct-Drive (Sirocco Fan)			
Filters (Default)	Qty	2			
	Type	Cleanable fibrous fleeces			
	Size (W x H x D)	855 x 10 x 160	855 x 6 x 230		
Filters (Optional)	Model	AHFT035H0		AHFT050H0	
	Qty	2			
	Type	F7			
Dry Contact	Size (W x H x D)	423,5 x 132 x 25	425 x 194 x 25		
		PDRYCB000			

- Note : 1, ERV mode : Total Heat Recovery Ventilation mode
 2, * : Refer to dimensional drawings.
 3, Noise level : - The operating conditions are assumed to be standard
 - Sound measured at 1,5m below the center the body.
 - Sound level will vary depending on a range of factors such as the construction(acoustic absorption coefficient) of particular room in which the equipment is installed.
 - The sound level at the air discharge port is about 8 dB(A) higher than the unit's operating sound.
 4, Temperature and Enthalpy Exchange Efficiency at cooling Indoor Temperature : 26,5°C DB, 64,5% RH, Outdoor Temperature : 34,5°C DB, 75% RH
 5, Temperature and Enthalpy Exchange Efficiency at heating Indoor Temperature : 20,5°C DB, 59,5% RH, Outdoor Temperature : 5°C DB, 65% RH
 6, Temperature Exchange efficiency is tested at heating condition.
 7, F7 Filter is 2 pieces in 1 filter package

Premium	Standard III	Standard II	CO ₂ Sensor
PREMTA000 PREMTA000A PREMTA000B	PREMTB100	PREMTBB10	AHCS100H0 (Internal Type)
PREMTB001	PREMTB001	PREMTB001	

LZ-H080GBA4 / LZ-H100GBA4
LZ-H150GBA4 / LZ-H200GBA4



Model		LZ-H080GBA4	LZ-H100GBA4	LZ-H150GBA4	LZ-H200GBA4	
Nominal Capacity	CMH (CFM)	800 (471)	1,000 (589)	1,500 (883)	2,000 (1,177)	
Power Supply	Ø / V / Hz	1 / 220-240 / 50, 60				
ERV Mode	Step	SUPER-HIGH / HIGH / LOW				
	Current	SH / H / L	2,77 / 2,16 / 1,44	3,41 / 2,90 / 1,76	5,60 / 5,40 / 2,90	6,80 / 5,90 / 3,60
	Power Input	SH / H / L	390 / 280 / 187	480 / 385 / 210	780 / 540 / 377	960 / 770 / 420
	Air Flow	SH / H / L	800 / 800 / 660 (471 / 471 / 388)	1,000 / 1,000 / 800 (589 / 589 / 471)	1,500 / 1,500 / 1,200 (883 / 883 / 706)	2,000 / 2,000 / 1,600 (1,177 / 1,177 / 942)
	External Static Pressure	SH / H / L	200 / 110 / 60 (0,80 / 0,44 / 0,24)	160 / 90 / 50 (0,64 / 0,36 / 0,20)	200 / 110 / 60 (0,80 / 0,44 / 0,24)	160 / 90 / 50 (0,64 / 0,36 / 0,20)
	Temperature Exchange Efficiency	SH / H / L	79 / 79 / 82	77 / 77 / 78	79 / 79 / 82	77 / 77 / 78
	Enthalpy Exchange Efficiency	Heating (SH / H / L) %	72 / 72 / 74	70 / 70 / 72	72 / 72 / 74	70 / 70 / 72
		Cooling (SH / H / L) %	63 / 63 / 66	59 / 59 / 63	63 / 63 / 66	59 / 59 / 63
	Noise Level (Sound Level, 1,5m)	SH / H / L	40 / 37 / 31	41 / 38 / 32	43 / 40 / 34	44 / 41 / 35
	Bypass Mode	Step	SUPER-HIGH / HIGH / LOW			
Current		SH / H / L	2,77 / 2,16 / 1,44	3,41 / 2,90 / 1,76	5,60 / 5,40 / 2,90	6,80 / 5,90 / 3,60
Power Input		SH / H / L	390 / 280 / 187	480 / 385 / 210	780 / 540 / 377	960 / 770 / 420
Air Flow		SH / H / L	800 / 800 / 660 (471 / 471 / 388)	1,000 / 1,000 / 800 (589 / 589 / 471)	1,500 / 1,500 / 1,200 (883 / 883 / 706)	2,000 / 2,000 / 1,600 (1,177 / 1,177 / 942)
External Static Pressure		SH / H / L	200 / 110 / 60 (0,80 / 0,44 / 0,24)	160 / 90 / 50 (0,64 / 0,36 / 0,20)	200 / 110 / 60 (0,80 / 0,44 / 0,24)	160 / 90 / 50 (0,64 / 0,36 / 0,20)
Noise Level (Sound Level, 1,5m)		SH / H / L	41 / 38 / 32	41 / 39 / 33	44 / 41 / 35	44 / 42 / 36
Heat Exchanger		Type	Air to air cross flow heat exchange			
Net Weight		kg	62	140	140	140
Dimension		W x H x D	1,062 x 365 x 1,140		1,313 x 738 x 1,140	
Duct work*		Qty	4		4 + 2	
	Size (Ø)	Ø250		Ø250 + Ø350		
Supply Air Fan	Qty	1		2		
	Type	Direct-Drive (Sirocco Fan)				
Exhaust Air Fan	Qty	1		2		
	Type	Direct-Drive (Sirocco Fan)				
Filters (Default)	Qty	2		4		
	Type	Cleanable fibrous fleeces				
	Size (W x H x D)	1,056 x 6 x 212,5		1,056 x 6 x 212,5		
Filters (Optional)	Model	AHFT100H0				
	Qty	2		4		
	Type	F7				
Dry Contact	Size (W x H x D)	520 x 192 x 25		520 x 192 x 25		
		PDRYCB000				

- Note : 1, ERV mode : Total Heat Recovery Ventilation mode
 2, * : Refer to dimensional drawings.
 3, Noise level : - The operating conditions are assumed to be standard
 - Sound measured at 1,5m below the center the body.
 - Sound level will vary depending on a range of factors such as the construction(acoustic absorption coefficient) of particular room in which the equipment is installed.
 - The sound level at the air discharge port is about 8 dB(A) higher than the unit's operating sound.
 4, Temperature and Enthalpy Exchange Efficiency at cooling Indoor Temperature : 26,5°C DB, 64,5% RH, Outdoor Temperature : 34,5°C DB, 75% RH
 5, Temperature and Enthalpy Exchange Efficiency at heating Indoor Temperature : 20,5°C DB, 59,5% RH, Outdoor Temperature : 5°C DB, 65% RH
 6, Temperature Exchange efficiency is tested at heating condition.
 7, F7 Filter is 2 pieces in 1 filter package


Premium	Standard III	Standard II	CO ₂ Sensor
PREMTA000 PREMTA000A PREMTA000B	PREMTB100	PREMTBB10	AHCS100H0 (Internal Type : Default)
PREMTB001	PREMTB001	PREMTB001	

ERV


LZ-H025GBA4



Ventilation




Efficiency




LZ-H100GBA4



Ventilation




Efficiency




LZ-H035GBA4



Ventilation




Efficiency




LZ-H150GBA4



Ventilation




Efficiency




LZ-H050GBA4



Ventilation




Efficiency




LZ-H200GBA4



Ventilation




Efficiency




LZ-H080GBA4



Ventilation




Efficiency



ERV WITH DX COIL


Providing Cool & Warm Fresh Air

During the summer, ERV DX can transform outdoor warm air into cool air for indoors, and it can prevent cold drafts during the winter by supplying warm air.

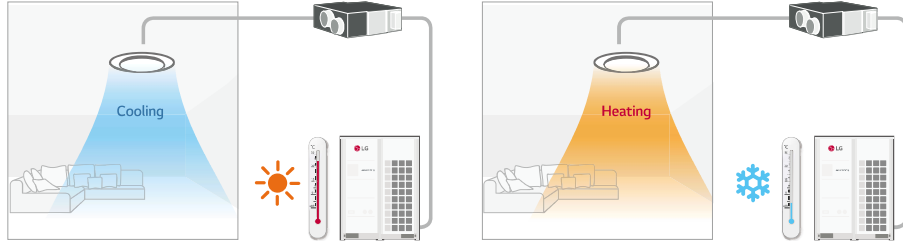


Total Air Conditioning Solution

LG ERV DX can be used as a Total Air Conditioning Solution. It can control condition of incoming air with the DX coil and humidifier for making comfortable indoor air. In the summer, LG ERV DX controls the air indoors by cooling and dehumidifying incoming air. In winter, it can provide warm air by heating and humidifying the incoming air.

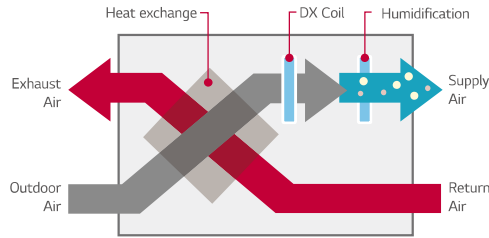

Interlocking with MULTI V

LG ERV DX can be interlocked with MULTI V. It can be controlled individually by a wired remote controller connected to MULTI V indoor units.

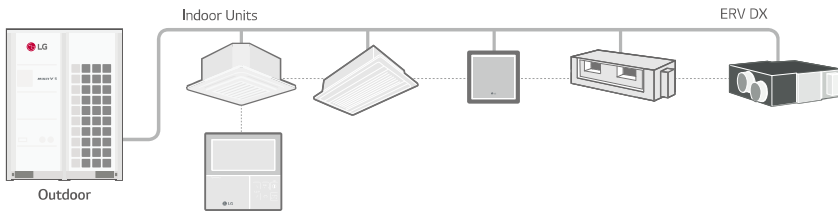

LZ-H050GXH4 / LZ-H080GXH4 / LZ-H100GXH4
LZ-H050GXN4 / LZ-H080GXN4 / LZ-H100GXN4



Model	LZ-H050GXH4	LZ-H080GXH4	LZ-H100GXH4	LZ-H050GXN4	LZ-H080GXN4	LZ-H100GXN4
Fresh Air	4.93	7.46	9.12	4.93	7.46	9.12
Conditioning Load	6.73	9.80	11.72	6.73	9.80	11.72
Temperature	SH / H / L	%	86 / 86 / 87	80 / 80 / 81	76 / 76 / 78	86 / 86 / 87
Exchange Efficiency	SH / H / L	%	61 / 61 / 63	50 / 50 / 53	45 / 45 / 50	61 / 61 / 63
Enthalpy Exchange Efficiency	Cooling (SH / H / L)	%	76 / 76 / 77	67 / 67 / 69	64 / 64 / 66	76 / 76 / 77
Efficiency	Heating (SH / H / L)	%	-15 ~ 45	-15 ~ 45	-15 ~ 45	-15 ~ 45
Operation Range	Outdoor air Temperature	°C	500 / 500 / 440	800 / 800 / 640	1,000 / 1,000 / 820	500 / 500 / 440
Air Flow Rate	Heat Exchange Mode (SH / H / L)	CMH	500 / 500 / 440	800 / 800 / 640	1,000 / 1,000 / 820	500 / 500 / 440
Fan	Bypass Mode (SH / H / L)	CMH	500 / 500 / 440	800 / 800 / 640	1,000 / 1,000 / 820	500 / 500 / 440
System	External Static Pressure (SH / H / L)	Pa	160 / 120 / 100	140 / 90 / 70	110 / 70 / 60	180 / 150 / 110
Humidifier	System	Natural Evaporating type	2.70	4.00	5.40	-
Amount	kg/h	Mpa	0.02 ~ 0.49	-	-	-
Pressure Feed Water	Mpa	dB (A)	38 / 36 / 33	39 / 37 / 34	40 / 38 / 35	39 / 37 / 35
Sound Pressure	Heat Exchange Mode (SH / H / L)	dB (A)	39 / 37 / 34	40 / 38 / 35	40 / 38 / 35	39 / 37 / 35
Bypass Mode (SH / H / L)	dB (A)	39 / 37 / 34	40 / 38 / 35	40 / 38 / 35	39 / 37 / 35	41 / 38 / 36
Refrigerant	R410A	Ø / V / Hz	1 / 220-240 / 50, 60	-	-	-
Power Supply	Ø / V / Hz	1 / 220-240 / 50, 60	0.25 / 0.20 / 0.15	0.42 / 0.35 / 0.25	0.48 / 0.42 / 0.27	0.25 / 0.20 / 0.15
Power Input	Heat Exchange Mode (SH / H / L)	kW	0.25 / 0.20 / 0.15	0.42 / 0.35 / 0.25	0.48 / 0.42 / 0.27	0.25 / 0.20 / 0.15
(Nominal)	Bypass Mode (SH / H / L)	kW	1.5 / 1.3 / 1.0	2.5 / 2.0 / 1.5	3.6 / 3.2 / 2.3	1.5 / 1.3 / 1.0
Nominal Running Current (RLA)	Heat Exchange Mode (SH / H / L)	A	1.5 / 1.3 / 1.0	2.5 / 2.0 / 1.5	3.6 / 3.2 / 2.3	1.5 / 1.3 / 1.0
Bypass Mode (SH / H / L)	A	1.5 / 1.3 / 1.0	2.5 / 2.0 / 1.5	3.6 / 3.2 / 2.3	1.5 / 1.3 / 1.0	2.5 / 2.0 / 1.5
Heat exchange system	Air to air cross flow total heat (sensible + latent heat) exchange	A	1.5 / 1.3 / 1.0	2.5 / 2.0 / 1.5	3.6 / 3.2 / 2.3	1.5 / 1.3 / 1.0
Heat exchange element	Air to air cross flow total heat (sensible + latent heat) exchange	A	1.5 / 1.3 / 1.0	2.5 / 2.0 / 1.5	3.6 / 3.2 / 2.3	1.5 / 1.3 / 1.0
Air Filter	Multidirectional fibrous fleeces	mm	1,667 x 365 x 1,140	105	98	1,667 x 365 x 1,140
Dimensions	W x H x D	mm	1,667 x 365 x 1,140	105	98	1,667 x 365 x 1,140
Net Weight	kg	mm	105	98	98	105
Piping Connection	Liquid	mm	Ø6.35	Ø6.35	Ø6.35	Ø6.35
Gas	mm	Ø12.7	Ø12.7	Ø12.7	Ø12.7	Ø12.7
Water	mm	Ø25 (1)	Ø25 (1)	Ø25 (1)	Ø25 (1)	Ø25 (1)
Drain Pipe (Internal Dia.)	mm (inch)	mm	Ø250	Ø250	Ø250	Ø250
Connection Duct Diameter	mm	mm	Ø250	Ø250	Ø250	Ø250

Note: 1. Cooling Capacity Test condition - Indoor temperature : 27°C DB, 19°C WB / Outdoor temperature : 35°C DB
2. Heating Capacity Test condition - Indoor temperature : 20°C DB / Outdoor temperature : 7°C DB, 6°C WB
3. Humidifying capacity is based on the following conditions - Indoor temperature : 20°C DB, 15°C WB / Outdoor temperature : 7°C DB, 6°C WB
4. Cooling and heating capacities are based on the following conditions : Fan is based on High and Super-high.
5. The operating sound measured at the point 1.5 m below the center of the unit is converted to that measured at an anechoic chamber.
6. The specifications, designs and information here are subject to change without notice.

Accessories

Chassis	LZ-H050GXH4	LZ-H080GXH4	LZ-H100GXH4	LZ-H050GXN4	LZ-H080GXN4	LZ-H100GXN4
Drain Pump	-	-	-	-	-	-
Cassette Cover	-	-	-	-	-	-
Refrigerant Leakage Detector	-	-	PRLDNVS0	-	-	-
EEV Kit	-	-	-	-	-	-
Independent Power Module	-	-	-	-	-	-
Robot Cleaner	-	-	-	-	-	-
Pre Filter (washable / anti-fungus)	-	-	-	-	-	-
Ion Generator	-	-	-	-	-	-
CO ₂ Sensor	-	-	-	AHCS100H0	-	-
Ventilation Kit	-	-	-	-	-	-
IR Receiver	-	-	-	-	-	-
Zone Controller	-	-	-	-	-	-
Dry Contact (with additional accessory)	-	-	-	PDRYC8000 (1 point contact)	-	-
External Input (1 point)	-	-	-	PDRYC8000 (Modbus)	-	-
Wi-Fi	-	-	-	○	-	-









































































※ ○ : Applied, - : Not applied
Option : Refer to model name in table

CONTROL SOLUTIONS

—
INDIVIDUAL CONTROL / CENTRALIZED CONTROL
INTEGRATION DEVICE



LG HVAC CONTROL LINE-UP

INDIVIDUAL CONTROL			CENTRALIZED CONTROL			CENTRALIZED CONTROL					INTEGRATION DEVICE					
Wired Remote Controller		Wireless Remote Controller	Display	Platform	Gateway	Facility Integrator	Indoor Unit		Outdoor Unit	AHU Kit	Facility Integrator		Indoor Unit		Outdoor Unit	AHU Kit
Standard	Simple						Dry Contact	Control Accessory								
Standard III (White)  PREMTB100	 PQRCVCLQW	 PQWRHQFDB	AC Ez  PQCSZ250S0 (Indoor Unit -32)	ACP 5  PAC5A000 (Indoor Unit -256)	 PLNWK000 (Indoor Unit -64)	PDI (Power Distribution Indicator)  Premium (8 port) PQNUD1540 Standard (2 port) PPWRDB000	 Simple Dry Contact PDRYCB000	 PZCWRG3	 IO Module (Input / Output Module) For MULTI V 5 PVDSMN000	 Communication Kit Return/Room Air control PAHCMR000	 Premium (8 port) PQNUD1540 Standard (2 port) PPWRDB000	 Dry Contact for Thermostat PDRYCB300	 Remote Temperature Sensor PQRSTAO	 Variable Water Flow Control kit For MULTI V WATER IV PWFECKN000	 Control kit For MULTI V IV, 5 PRVC2	 Control kit For MULTI V IV, 5 PRVC2
W-Fi Controller																
Standard III (Black)  PREMTBB10	 PQRCVCLQ	 LG Wi-Fi Modem For Indoor Unit PWFMD200	AC Ez Touch  PACEZA000 (Indoor Unit -64)	AC Manager 5  PACM5A000 (Indoor Unit -8,192)	Modbus RTU Gateway  PMBUSB00A	ACS IO Module (Input / Output Module)  PEXPMB000	 Dry Contact for Thermostat PDRYCB300	 Remote Temperature Sensor PQRSTAO	 Variable Water Flow Control kit For MULTI V WATER IV PWFECKN000	 Control kit For MULTI V IV, 5 PRVC2	 Chiller Option Kit PCHILLN000	 2 Points Dry Contact (For Setback) PDRYCB400	 Low Profile Remote Temperature Button Sensor ZRTBS01	 Low Ambient Kit For MULTI V IV, 5 PRVC2	 Control kit For MULTI V IV, 5 PRVC2	 Control kit For MULTI V IV, 5 PRVC2
Standard II (White)  PREMTB001	 PQRCHCA0QW (Simple for Hotel)		AC Smart 5  PACSSA000 (Indoor Unit -128)		KNX Gateway  LG-AC-KNX4 LG-AC-KNX8 LG-AC-KNX16 LG-AC-KNX64	Chiller Option Kit  PCHILLN000	 For Modbus PDRYCB500	 Low Profile Remote Temperature Button Sensor ZRTBS01	 Low Ambient Kit For MULTI V IV, 5 PRVC2	 Control kit For MULTI V IV, 5 PRVC2	 ACU IO Module NEW UIO PEXPM300	 For Modbus PDRYCB500	 Low Profile Remote Temperature Button Sensor ZRTBS01	 Low Ambient Kit For MULTI V IV, 5 PRVC2	 Control kit For MULTI V IV, 5 PRVC2	 Control kit For MULTI V IV, 5 PRVC2
Standard II (Black)  PREMTBB01	 PQRCHCA0Q (Simple for Hotel)				PI-48S  PHNFP14A0 For Indoor Unit (ERV)	ACU IO Module NEW UIO PEXPM300	 For Modbus PDRYCB500	 Low Profile Remote Temperature Button Sensor ZRTBS01	 Low Ambient Kit For MULTI V IV, 5 PRVC2	 Control kit For MULTI V IV, 5 PRVC2	 ACU IO Module NEW UIO PEXPM300	 For Modbus PDRYCB500	 Low Profile Remote Temperature Button Sensor ZRTBS01	 Low Ambient Kit For MULTI V IV, 5 PRVC2	 Control kit For MULTI V IV, 5 PRVC2	 Control kit For MULTI V IV, 5 PRVC2
Premium																
 PREMTA000 PREMTA000A PREMTA000B						ACU IO Module NEW UI PEXPM100	 For Modbus PDRYCB500	 Low Profile Remote Temperature Button Sensor ZRTBS01	 Low Ambient Kit For MULTI V IV, 5 PRVC2	 Control kit For MULTI V IV, 5 PRVC2	 ACU IO Module NEW UI PEXPM100	 For Modbus PDRYCB500	 Low Profile Remote Temperature Button Sensor ZRTBS01	 Low Ambient Kit For MULTI V IV, 5 PRVC2	 Control kit For MULTI V IV, 5 PRVC2	 Control kit For MULTI V IV, 5 PRVC2

Note
 1, AC Smart 5 & ACP 5 provides BACnet IP / Modbus TCP
 2, KNX Gateway is provided by INTESIS

OUTDOOR UNITS
 INDOOR UNITS
 HOT WATER SOLUTION
 VENTILATION SOLUTIONS
 CONTROL SOLUTIONS
 ACCESSORIES

LG CONTROL SOLUTIONS








MULTI V 5 offers a diverse range of effective control solutions that satisfy specific needs of each building and its user scene. These controlling systems are equipped with user friendly interface, flexible interlocking environment, energy management and smart individual controller for optimized controlling conditions and smart building management.



INDIVIDUAL CONTROL



FEATURE FUNCTIONS

Controller Name	Wired Remote Controller					Wireless Remote Controller	Wi-Fi Controller
	Premium	Standard III	Standard II	Simple	Simple(Hotel)		
Model Name							
	PREMTA000 PREMTA000A PREMTA000B	PREMTB100 PREMTBB10	PREMTB001 PREMTBB01	PQRCVCL0Q PQRCVCL0QW	PQRCHCA0Q PQRCHCA0QW	PQWRHQ0FDB	PWFMD200
Basic							
On / Off	○	○	○	○	○	○	○
Fan Speed Control	○	○	○	○	○	○	○
Temperature Setting	○	○	○	○	○	○	○
Mode Change	○	○	○	○	-	○	○
Auto Swing	○	○	○	○	○	○	○
Vane Control (Louver Angle)	○	○	○	○	○	○	○
E.S.P (External Static Pressure)	○	○	○	○	○	-	-
Electric Failure Compensation	○	○	○	○	○	-	○
Indoor Temperature Display	○	○	○	○	○	○	-
ALL Button Lock (Child Lock)	○	○	○	○	○	-	-
Advanced							
Schedule / Timer	Weekly-Yearly	Weekly-Yearly	Weekly	-	-	Sleep / On / Off	Weekly
Additional Mode Setting ¹⁾	○	○	○	-	-	-	-
Time Display	○	○	○	-	-	○	-
Humid. Display	○	○	-	-	-	-	-
Advanced Lock (mode, set point, set point range, On / Off Lock)	Advanced Lock	Advanced Lock	Mode Lock	-	-	-	-
Filter Sign	○	○	○	-	-	-	-
Energy Management ²⁾	○	○	○	-	-	-	-
Dual Set Point	○	○	-	-	-	-	-
Human Detection	-	○	-	-	-	-	-
Temp, Humidity Compensation	○	○	-	-	-	-	-
Wi-Fi AP Mode Setting	○	○	○	○	○	○	-
ETC							
Operation Status LED	○	○	○	○	○	-	-
Wireless Remote Controller Receiver	○ ³⁾	-	○ ³⁾	○ ³⁾	○ ³⁾	-	-
Display	5 inch Color	4,3 inch Color	4,3 inch mono	2,6 inch mono	2,6 inch mono	2 inch mono	-
Size (W x H x D, mm)	137 x 121 x 16,5	120 x 120 x 16	120 x 120 x 16	64 x 120 x 15	64 x 120 x 15	51 x 153 x 26	-
Black Light Control for Screen Saver	○	○	-	-	-	-	-

※ ○ : Applied, - : Not Applied

1) It might not be indicated or operated at the partial product

2) Centralized control (PACEZA000 / PACSSA000 / PACPSA000 / PLNWK000) and PDI (PQNUD1S40 / PPWRDB000) should be installed for this function

3) For ceiling type duct

Note : 1. Indoor unit should have functions requested by the controller

2. If you need more detail, please refer to the manual of product, (<http://partnedge.com: Home > DocLibrary > Manual>)

OUTDOOR UNITS

INDOOR UNITS

HOT WATER SOLUTION

VENTILATION SOLUTIONS

CONTROL SOLUTIONS

ACCESSORIES

STANDARD III WIRED REMOTE CONTROLLER

4.3 inch Color screen with a modern design.





PREMTB100 (White) PREMTB10 (Black)

- The Optimized Controller in MULTI V 5
- Humidity sensor embedded
- Comfort cooling setting
- Smart Load Control setting
- Outdoor unit low noise setting
- Defrost mode setting
- New Modern Design & Easy Interface
- Seamless design / Touch button
- 4.3 inch color LCD / Intuitive GUI
- Energy Saving Functions
 - Instantaneous power monitor
 - Energy consumption check (power consumption, operation time)
 - Temp. Setback Timer, Time Limit Control
 - Target setting (ODU Capacity, Instantaneous power-etc)
- Group Control
 - Up to 16 Indoor units can be controlled with one remote control
- External Device On / Off (1 point)
 - Customized interlocking control with indoor unit is possible without dry contact
- 2 Set Points Control
 - Increase convenience and comfort
 - Auto changeover, Setback (home leave)

Model Name	PREMTB100 / PREMTB10
On / Off	○
Fan Speed Control	○
Temperature Setting	○
Mode Change	Cooling / Heating / Auto / Dehumidification / Fan
Additional Mode Setting ¹⁾	Energy-Saving Cooling / Robot Cleaning / Heater / Humidification / Comfort Cooling
Auto Swing	○
Vane Control (Louver direction)	○
E.S.P (External Static Pressure) ²⁾	○
Reservation	Simple / Sleep / On & Off timer / Weekly / Yearly / Holiday
Time Display	○
Electric Failure Compensation	○
Lock	All / On & Off / Mode / Set temperature range
Filter Sign	○ (Remain time + Alarm)
Energy Management	Check Energy Usage 3) / Check Operation Time / Target Setting (Energy, Operation Time) / Time Limit Operation / Alarm Popup / Initialization Usage Data
Operation Status LED	○
Indoor Temperature Display	○
Indoor Humidity Display	○
Display	4.3 inch TFT color LCD (480 x 272)
Size (W x H x D, mm)	120 x 120 x 16
Black light for Screen saver	○
Home Leave	2 set points control


※ ○ : Applied, - : Not Applied
 1) It might not be indicated or operated at the partial product
 2) This function is available for duct type
 3) This function requires PDI (PQNUD1S40 / PPWRDB000) to be installed.
 Note: 1. Indoor unit needs to have functions requested by the controller
 2. 2 set points control works normally with MULTI V Heat Recovery and Single Split Heat Pump. But in case of MULTI V Heat Pump, It may not work properly

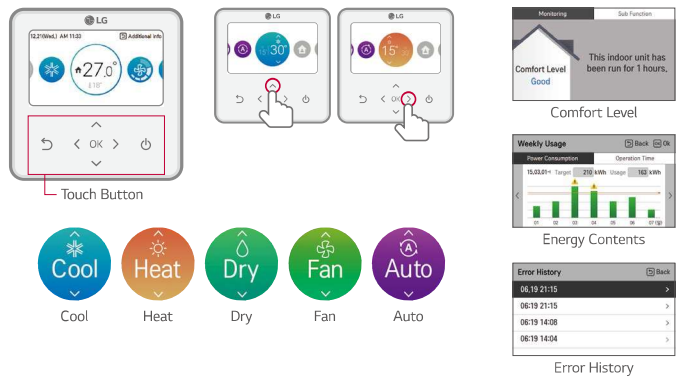

Energy Saving Function


Energy Management

- Energy Monitoring & Alarm
 Real-time and day / week / month / year energy usage monitoring is possible. In addition, it can set target for energy usage and operation time, and alarm will be displayed when exceeded.
 * PDI (PQNUD1S40 / PPWRDB000) is required.

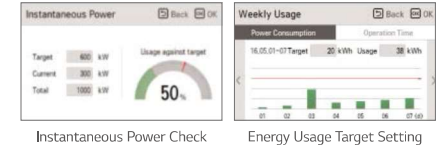

Time Limit Control

- The time-limit operation is to limit the amount of time.
 By setting the device operation time in advance, you can control for how long a device works and have it stop automatically.

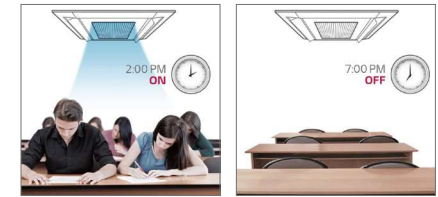


2 Set Points Control

Auto Changeover (Convenience)

- The indoor unit automatically manages room temperature with heating and cooling with extended setting temperature ranges.
 With setting heating and cooling set temp. just one time, comfortable condition will continue at all times.


Setback (Home Leave) (Energy saving & Comfort)

- In the absence, room temperature can be kept in the range of 2 set points instead of power off. It provides comfortable indoor environment quickly when the mode is changed to occupied.

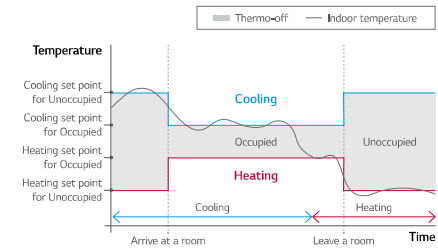

* This function is for Heat Recovery system or Single heat pump. Otherwise it is not guaranteed.

External Device On / Off



External Equipment Control
 User can turn on or off the external equipment through contact point output.




Customized Interlocking Control
 User can make control scenario. example) When temperature is under 10 degree, turn on the external heater.

Schedule Function



Easy Checking Schedule
 Standard III remote controller provides clock type daily schedule.



Exception Day settings
 Convenient settings are possible with schedule exception settings.

PREMIUM WIRED REMOTE CONTROLLER

5 inch full touch screen with a premium design.



PREMTA000¹⁾ / PREMTA000A²⁾ / PREMTA000B³⁾

1) English / Portuguese / Spanish / French
2) English / Italian / Russian / Chinese
3) English / German / Polish / Czech

Features & Benefit

- Full Touch screen
- The Optimized Controller in MULTI V 5
 - Comfort cooling setting
 - Smart Load Control setting
 - Outdoor unit low noise setting
 - Defrost mode setting
- Design with User's Convenience
 - Intuitive GUI
 - Main display simple mode
 - 5 inch color LCD
- Energy Saving Functions
 - Instantaneous power monitor
 - Energy consumption check (power consumption, operation time)
 - Temp. Setback Timer, Time Limit Control
 - Target setting (ODU Capacity, Instantaneous power-etc)
- Group Control
 - Up to 16 Indoor units can be controlled with one remote control
- 2 Set Points Control
 - Increase convenience and comfort
 - Auto changeover, Setback (home leave)

Model Name	PREMTA000 / PREMTA000A / PREMTA000B
On / Off	○
Fan Speed Control	○
Temperature Setting	○
Mode Change	Cooling / Heating / Auto / Dehumidification / Fan
Additional Mode Setting ¹⁾	Energy-Saving Cooling / Robot Cleaning / Heater / Humidification
Auto Swing	○
Vane Control (Louver direction)	○
E.S.P (External Static Pressure) ²⁾	○
Reservation	Simple / Sleep / On / Off / Weekly / Yearly / Holiday
Time Display	○
Electric Failure Compensation	○
Child Lock	○
Filter Sign	○ (Remain time + Alarm)
Energy Management	Check Energy Usage ³⁾ / Check Operation Time / Target Setting (Energy, Operation Time) / Time Limit Operation / Alarm Popup / Initialization Usage Data
Operation Status LED	○
Indoor Temperature Display	○
Wireless Remote Controller Receiver	○ ⁴⁾
Display	5-inch TFT color LCD (480 x 272)
Size (W x H x D, mm)	137 x 121 x 16,5
Back Light for Screen Saver	○
Home Leave	2 set points control

※ ○ : Applied, - : Not Applied
1) It might not be indicated or operated at the partial product
2) This function is available for duct type
3) This function requires PCM (PQNUD1540 / PPWRD0000) to be installed.
4) For ceiling type ducted unit
Note : 1. Indoor unit needs to have functions requested by the controller
2. 2 set points control works normally with MULTI V Heat Recovery and Single Split Heat Pump. But in case of MULTI V Heat Pump, It may not work properly



Easy Energy Management

- Check the operation hour or electricity usage
- Comparison of usage compared to last year
- Set the target usage and time



Easy Scheduling


- Daily, Weekly, Yearly schedule function
- Schedule pattern setting
- Schedule copy



2 Set points Control


- Auto changeover switching the operation mode automatically
- Setback (Home Leave) Changing status by occupied / unoccupied

* This function is only for Heat Recovery system and Single heat pump.

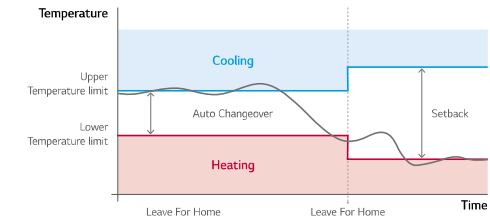

Group Control

1. Max. 16 Indoor units by one remote controller.

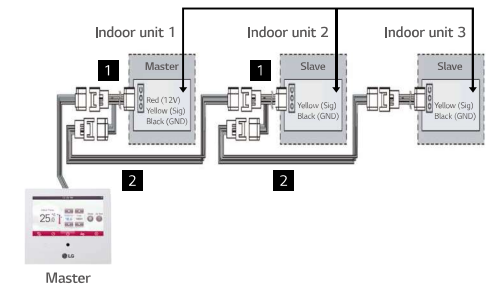

STANDARD II WIRED REMOTE CONTROLLER

Providing easy control of one or a group of indoor units with various functions.



PREMTB001 (White)

PREMTB001 (Black)

Features & Benefit

- Wired remote controller that can implement various functions such as schedule, filter sign.

Model Name	PREMTB001 / PREMTB01
On / Off	○
Fan Speed Control	○
Temperature Setting	○
Mode Change	Cooling / Heating / Auto / Dehumidification / Fan
Additional Mode Setting	Energy-Saving Cooling / Robot Cleaning / Heater / Humidification
Auto Swing	○
Vane Control (Louver direction)	○
E.S.P (External Static Pressure)	○
Reservation	Simple / Sleep / On / Off / Weekly / Holiday
Time Display	○
Electric Failure Compensation	○
Child Lock	○
Filter Sign	○ (Remain time + Alarm)
Operation Status LED	○
Indoor Temperature Display	○
Wireless Remote Controller Receiver	○ ¹⁾
Size (W x H x D, mm)	120 x 120 x 16
Blacklight	○
Power Consumption Monitoring	○ ²⁾
Check Model Information	○

※ ○ : Applied, - : Not Applied

1) For ceiling type ducted unit

2) This function requires PDI (PQNUJ1S40 / PPWRDB000) to be installed.

Note : Indoor unit needs to have functions requested by the controller

SIMPLE WIRED REMOTE CONTROLLER

A simple way to control office or hotel systems in a compact design



PQRVCVLOQW (White) / PQRVCVLOQ (Black)

PQRCHCAQW (White) / PQRCHCAQ (Black)

Features & Benefit

- Small remote control with minimal functionality

Model Name	PQRVCVLOQW / PQRVCVLOQ	PQRCHCAQW / PQRCHCAQ
On / Off	○	○
Fan Speed Control	○	○
Temperature Setting	○	○
Mode Change	Cooling / Heating / Auto / Dehumidification / Fan	Only Changeable by Central Controller
Auto Swing	○	-
Vane Control (Louver direction)	○	-
E.S.P (External Static Pressure)	○	○
Electric Failure Compensation	○	○
Child Lock	○	○
Indoor Temperature Display	○	○
Wireless Remote Controller Receiver	○ ¹⁾	○ ¹⁾
Size (W x H x D, mm)	70 x 121 x 16	70 x 121 x 16
Blacklight	○	○

※ ○ : Applied, - : Not Applied

1) For ceiling type ducted unit

Note : Indoor unit needs to have functions requested by the controller

WIRELESS REMOTE CONTROLLER



PQRWRHQ0FDB

Features & Benefit

- Easy to use while moving
- Main functions are available

Model Name	PQRWRHQ0FDB
On / Off	○
Fan Speed Control	○
Temperature Setting	○
Mode Change	Cooling / Heating / Auto / Dehumidification / Fan
Additional Mode Setting	Plasma Purification / Energy-Saving Cooling / Robot Cleaning / Auto Dry
Auto Swing	○
Vane Control (Louver direction)	○
Reservation	Sleep / On / Off
Indoor Temperature Display	○
Sleep Mode Auto	Max, 7 hours
Size (W x H x D, mm)	51,4 x 153 x 26

※ ○ : Applied, - : Not Applied

LG Wi-Fi MODEM

Control LG air conditioners via using the internet devices as Android or iOS smartphones.



PWFMDD200

Model Name	PWFMDD200
Size (W x H x D, mm)	48 x 68 x 14
Interfaceable Products	MULTI V Indoor unit ¹⁾
Connection Type	Indoor unit 1:1
Communication Frequency	2.4 GHz
Wireless Standards	IEEE 802.11b/g/n
Mobile Application	LG SmartThinQ (Android v4.1(Jellybean) or higher, iPhone iOS 9.0 or higher)
Optional Extension Cable	PWYREW000 (10m extension)


- Vane Control may not be possible according to the type of Indoor unit
 - LG Centralized controller and PDI installation is required for this function
 - For the compatibility with Indoor unit, please contact regional LG office
- Note: 1. Functionality may be different according to each IDU model
 2. User interface of application shall be revised for its design and contents improvement
 3. Application is optimized for smartphone use, so it may not be well functioning with tablet devices

Features & Benefit

- Access LG air conditioner anytime and from anywhere with Wi-Fi equipped device.
- It is possible to check whether the air conditioner is turned off when the user goes out (energy saving), and can be operated in advance before entering the house (comfort improvement).
- LG's exclusive Home Appliances control app(SmartThinQ) is available
- Simple operation for various functions
 - On / Off
 - Operation Mode
 - Current/Set Temperature
 - Fan Speed
 - Vane Control¹⁾
 - Reservation (Sleep, Weekly On / Off)
 - Energy Monitoring²⁾
 - Filter Management
 - Error Check




Overview

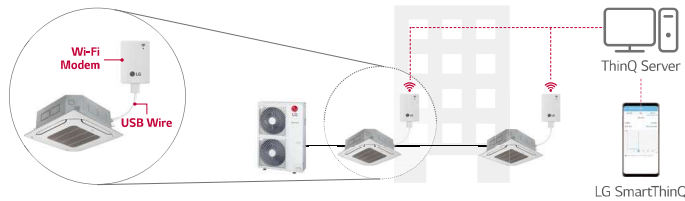


* Search "LG SmartThinQ" on Google market or Appstore then download the app. * Internet service with Wi-Fi connection has to be available.

Installation Scene

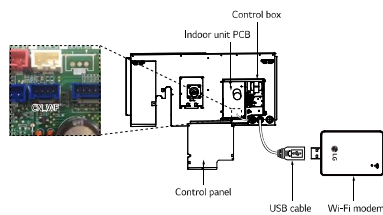

* Each indoor unit has a Wifi modem installation location inside the product, and it can be installed by exposure if necessary.

Connected Diagram

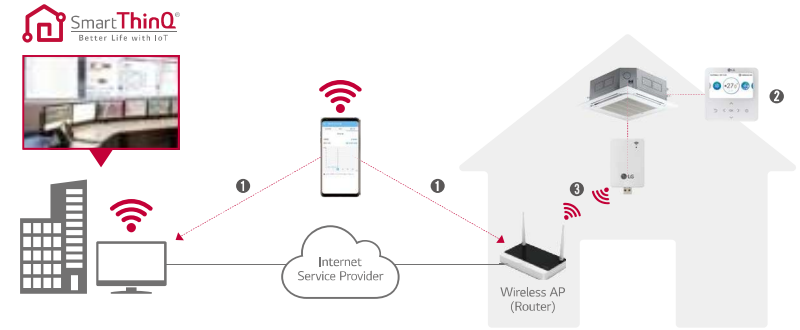


Connection (Pairing) Order


- Make LG account on LG Smart ThinQ and select the Router that will use
- Insert passwords of selected router and do set AP by LG remote controller
- Confirm the pairing between Wi-Fi Modem and Router

Smart ThinQ

Simple operation for various functions

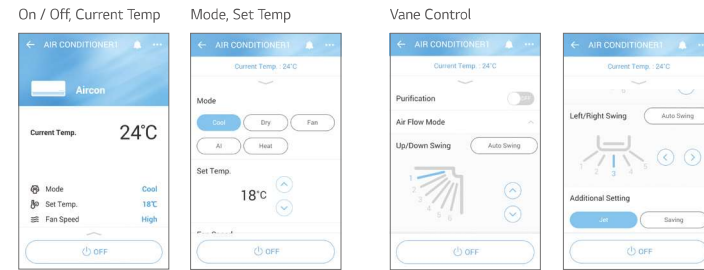



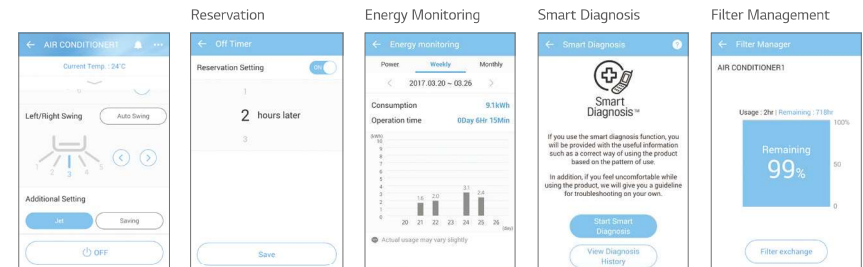

Straight forward Management



CENTRALIZED CONTROL



CENTRALIZED CONTROLLER FEATURE LIST

Controller Name		AC Ez	AC Ez Touch	AC Smart 5 ³⁾	ACP 5 ³⁾	ACP Lonworks	AC Manager 5 ³⁾	
Model Name								
		PQCSZ250S0	PACEZA000	PACSSA000	PACPSA000	PLNWKB000	PACMSA000	
Product	DO	-	-	2	4	2	-	
	DI	-	1	2	10	2	-	
	IDUs	32	64	128	256	64	8,192	
	ERV	32	64	128	256	64	-	
	Max. Connectable No.	A/C + ERV	32	64	128	256	64	-
	AHU	-	-	16	16	16 ⁴⁾	-	
	Chiller	-	-	5 Optional ²⁾	10 Optional ²⁾	-	-	
Compatibility	Air Conditioner	○ ¹⁾	○	○	○	○	○	
	Ventilation (ERV / ERV DX)	○ ¹⁾	○	○	○	○	○	
	Heating	-	○	○	○	○	○	
	AHU	-	-	○	○	○	○	
	Chiller	-	-	○ ⁴⁾	○ ⁴⁾	-	○	
	ACS IO	-	-	○ ⁴⁾	○ ⁴⁾	○ ⁴⁾	○	
Additional Function	Add Drawing	-	-	○ ⁴⁾	○ ⁴⁾	○ ⁴⁾	○	
	Group Management	-	-	○ ⁴⁾	○ ⁴⁾	○ ⁴⁾	○	
	Auto Changer Over	-	○	○ ⁴⁾	○ ⁴⁾	○ ⁴⁾	○	
	Set Back	-	○	○ ⁴⁾	○ ⁴⁾	○ ⁴⁾	○	
	2 Set	-	○	○	○	○ ⁴⁾	-	
	Change Alarm	-	Filter	Filter	Filter	Filter	Filter	
	Indoor Unit Lock	-	○	○	○	○ ⁴⁾	-	
	Cycle	-	-	○	○	○ ⁴⁾	○	
Schedule	○	○	○ ⁴⁾	○ ⁴⁾	○ ⁴⁾	○		
Auto Control	Peak Control	-	○	○	○	○ ⁴⁾	○	
	Demand Control	Priority Control	-	-	○ ⁴⁾	○ ⁴⁾	○ ⁴⁾	○
		Outdoor Unit Capacity Control	-	-	-	-	○ ⁴⁾	○
	Time limit control	-	-	○ ⁴⁾	○ ⁴⁾	○ ⁴⁾	○	
	InterLocking	-	-	○ ⁴⁾	○ ⁴⁾	○ ⁴⁾	○	
Energy Navigation	-	-	○ ⁴⁾	○ ⁴⁾	-	○		
Energy Report	Power	-	○	○	○	○ ⁴⁾	○	
	Gas	-	-	○	○	○ ⁴⁾	○	
	Run time	-	-	○ ⁴⁾	○ ⁴⁾	○ ⁴⁾	○	
	Email	-	-	○ ⁴⁾	○ ⁴⁾	○ ⁴⁾	-	
Trend Reporting	PC / USB	-	-	○ ⁴⁾	PC	PC	PC	
	History	-	-	-	-	-	○	
History	Report (Control / Error)	-	Error	○ ⁴⁾	○ ⁴⁾	○ ⁴⁾	○	
	Send Email	-	-	○ ⁴⁾	○ ⁴⁾	○ ⁴⁾	○	
	Save to PC / USB	-	-	○ ⁴⁾	○ ⁴⁾	○ ⁴⁾	PC	
etc	Summer Time	-	○	○ ⁴⁾	○ ⁴⁾	○ ⁴⁾	-	
	Outdoor Unit Oil-Return Operation	-	-	○ ⁴⁾	○ ⁴⁾	○ ⁴⁾	-	
	User Authority	-	Password	○ ⁴⁾	○ ⁴⁾	○ ⁴⁾	○	
	PC Access	-	○	○ ⁴⁾	○ ⁴⁾	○ ⁴⁾	○	

※ ○ : Applied - : Not Applied
 1) Except for some feature (individual lock, limit, temp, etc.)
 2) Except for some feature (user mode, additional function, etc.)
 3) ACP 5 or AC Smart 5 is required
 4) This function is possible to use in Web Only (BMS Point is not applied)
 5) Without additional device, ACP 5 and AC Smart 5 provide BACnet IP and Modbus TCP interface for BMS

OUTDOOR UNITS

INDOOR UNITS

HOT WATER SOLUTION

VENTILATION SOLUTIONS

CONTROL SOLUTIONS

ACCESSORIES

AC EZ TOUCH

Smart management with 5 inch touch screen for small site.



PACEZA000


Model Name	PACEZA000
Size (W x H x D, mm)	137 x 121 x 25
Interfaceable Products	MULTI V / ERV / ERV DX / Hydro kit / THERMA V
Maximum number of units	64
Individual / Group Control	On & Off / Mode / Temperature / Fan speed
Individual Controller Lock	Temperature / Mode / Fan speed / All
Error Check	○
Slave Mode (Interlocking with higher level controller)	○
Schedule	Weekly / Monthly / Yearly / Exception day
Remote Access	By client S/W
Emergency Stop & Alarm Display	○
Power Consumption Monitoring (with PDI)	○
Auto Changeover / Setback	○
Temperature Limit	○
Operation History	Error record
ODU Low Noise ¹⁾	○
Daylight Saving Time	○
External IO Port	DI 1
IPv6 Support	○

※ ○ : Applied, - : Not Applied
1) It is only available in some products

Features & Benefit

- Remote Access with Graphical User Access Control
- Total 200 Schedule Events
- Energy saving mode
- Energy Monitoring (with PDI)
- 2 Set point function (Upper/Lower Temperature setting)
- Temperature Set points Range Limit
- Remote Controller Lock (All, Temp, Mode, Fan Speed)
- Operation History
- Change alarm (Filter change)
- Emergency stop

Overview

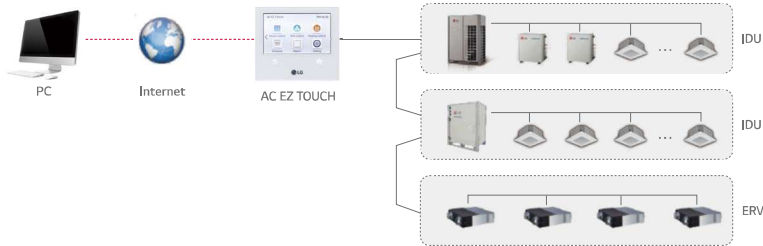

Feature

PC Access

Users can control each space efficiently through PC access.



Energy Statistics (with PDI)

Statistics of operational status (time, power consumption) are provided to help make intelligent system operation decisions.

Energy		
2016. 2. 8 ~ 2016. 3. 19		
Name	Usage(kWh)	Accumulated(kWh)
Group1	110	3021
Group2	150	6186
Group3	130	4267
Group4	120	7614


Energy Mode

When using energy mode function, operation mode changes from cooling to fan or heating to off mode by force. (It is available only 'on' mode indoor unit)



Alarm Indicator

It works when there are some errors or it's time to change the filter. Users can respond immediately according to alarm indicator therefore HVAC system is monitored consistently.



Schedule

Schedule control allows user to set the events in advance to maximize system performance. Also, by blocking unnecessary operation, it prevents a waste of energy.



Group / Individual Control

According to the situation, it can be controlled by group or each indoor unit. It is useful to monitor or control for the best fit of request.



AC EZ

Easy to manage up to 32 indoor units, including ERV with simple interface.



PQCSZ250S0

Model Name	PQCSZ250S0
Size (W x H x D, mm)	190 x 120 x 20
Interfaceable Products	MULTI V / ERV / ERV DX
Display	LED / LCD Display
Power	DC 12V
Maximum number of units	32
Individual / Group Control	On & Off / Mode / Temperature / Fan speed
Individual Controller Lock	All
Error Check	○
Slave Mode (Interlocking with higher level controller)	○
Schedule	Weekly

※ ○ : Applied, - : Not Applied

Features & Benefit

- 32 indoor units control
- Weekly Schedule
- Individual / Group Control



• Appropriate P1 485 should be used according to PDB

AC SMART 5

Control LG air conditioners via using the internet devices as Android or iOS bases smartphones.



PACSSA000


Features & Benefit

- The central controller allows control of the LG HVAC system to various platforms. (Touch screen, PC, Smartphone, Tablet)
 - DI : 2 / DO : 2
 - Max. 128 IDU control
 - BACnet IP/Modbus TCP
 - Schedule
 - Map View (Visual Navigation)
 - Time limit control / Auto change over
 - Energy monitoring
 - History / Operation Trend
 - Interlock with 3rd party equipment (ACS IO, ACU IO Module is needed)
 - Multi level grouping
 - Emergency stop & alarm
 - Error alarm by E-mail

Model Name	PACSSA000
Size (W x H x D, mm)	253,2 x 167,7 x 28,9
Interfaceable Products	MULTI V / ERV / ERV DX / HYDRO KIT / THERMA V / AHU kit / LG Chiller ¹⁾
Maximum number of units	128
Individual / Group Control	On & Off / Mode / Temperature / Fan speed
Individual Controller Lock	Temperature / Mode / Fan speed / All
Advanced Function Setting and Display ²⁾	Comfort Cooling / ODU Low Noise / ODU Defrost Mode / Comfort Level display / CO ₂ Level display (for ERV / ERV DX) / Night Time Free Cooling (for ERV / ERV DX)
Error Check	○
Slave Mode (Interlocking with higher level controller)	○
Schedule	Weekly / Monthly / Yearly / Exception day
Web Access	○
Emergency Stop & Alarm Display	○
Power Consumption Monitoring (with PDI)	○
Auto Changeover / Setback	○
Temperature Limit	○
Operation Time Limit	○
Visual Navigation	○
Operation Trend	○
Interlock Control	○
Virtual Group Control	○
ODU Capacity Control	○
Energy Navigation (with PDI)	○
Daylight Saving Time	○
External IO Port	DI 2 / DO 2
BMS Integration ³⁾	BACnet IP / Modbus TCP
IPv6 Support	○

○ : Applied, - : Not Applied
 1) Chiller Option Kit (PCHLLN000) is required
 2) It is only available in some products
 3) For the detail point list, please refer to the installation manual


Overview

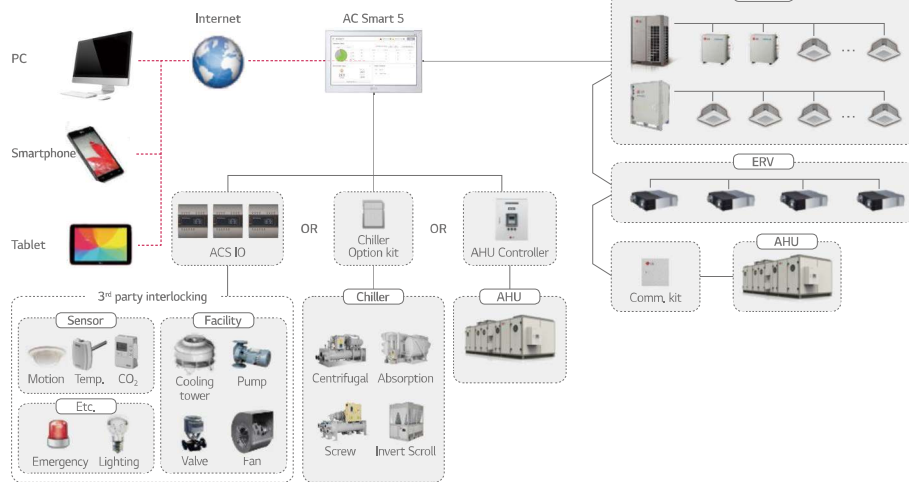

Feature


BMS Integration

Without additional device, AC Smart 5 provides BACnet IP / Modbus TCP interface for BMS (Building Management System) integration as well as its own management function.

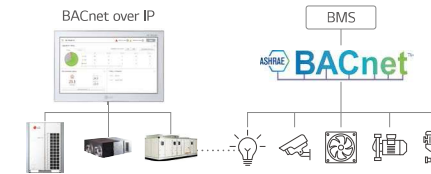


Energy Management / Operation Trend

Energy navigation function allows air conditioners operation to be managed under the monthly (Weekly / Yearly) plan of energy usage. By analyzing present energy consumption and comparing with the plan, overuse of system operational costs can be prevented.




Advanced Network Accessibility

AC Smart 5 reflects the state of the art of network technology trend. IPv6 (Internet Protocol version 6), which is the most recent version of the Internet Protocol, provides accessibility to the IPv6 compatible network environment. In addition, HTML5 allows you to easily control LG HVAC system on a variety of platforms (PC, Mobile, Tablet), at any time and from any location, not just on the touch screen.

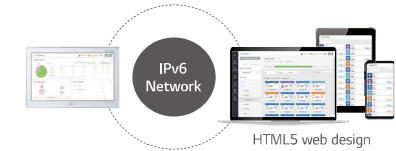


Visualized Control

Visual navigation enables controlling and monitoring the unit on floor plan view for the intuitive management.

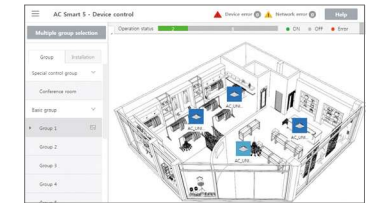


Multi Level Group Composition

You can freely apply layer structure such as building, floor, zone, etc, and set the group as the same as the site composition to control and monitor the devices. Special control group You can additionally compose frequently used groups such as VIP Room, executive room, etc, regardless of the building structure.



Interlocking with 3rd party equipment

AC Smart 5 can make operation scenario with 3rd party equipment by ACS IO Module. Control coverage is expanded. (Air conditioner only → Sensors, Fans, Pumps, Switches...)

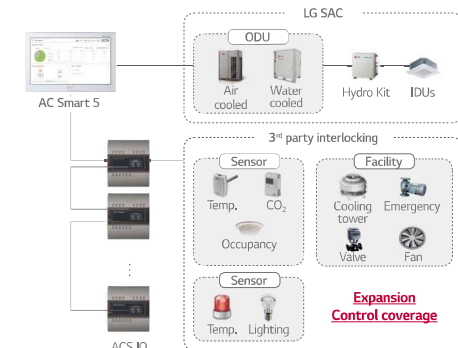

ACP 5

Advanced solution for BMS integration up to 256 units via BACnet and Modbus protocol as well as its own smart management function with web server interface.



PACP5A000


Features & Benefit

- The central controller allows control of the LG HVAC system to various platforms. (PC, Smartphone, Tablet)
- DI:10 / DO : 4
- Max. 256 IDU control
- BACnet IP/Modbus TCP
- Schedule
- Map View (Visual Navigation)
- Time limit control / Auto change over
- Energy monitoring
- History / Operation Trend
- Interlock with 3rd party equipment (ACS IO, ACU IO Module is needed)
- Multi level grouping
- Emergency stop & alarm
- Error alarm by E-mail

Model Name	PACP5A000
Size (W x H x D, mm)	270 x 155 x 65
Interfaceable Products	MULTI V / ERV / ERV DX / HYDRO KIT / THERMA V / AHU kit / LG Chiller ¹⁾
Maximum number of units	256
Individual / Group Control	On & Off / Mode / Temperature / Fan speed
Individual Controller Lock	Temperature / Mode / Fan speed / All
Advanced Function Setting and Display ²⁾	Comfort Cooling / ODU Low Noise / ODU Defrost Mode / Comfort Level display / CO ₂ Level display (for ERV / ERV DX) / Night Time Free Cooling (for ERV / ERV DX)
Error Check	○
Schedule	Weekly / Monthly / Yearly / Exception day
Web Access	○
Emergency Stop & Alarm Display	○
Power Consumption Monitoring (with PDI)	○
Auto Changeover / Setback	○
Temperature Limit	○
Operation Time Limit	○
Visual Navigation	○
Operation Trend	○
Interlock Control	○
Virtual Group Control	○
ODU Capacity Control	○
Energy Navigation (with PDI)	○
Daylight Saving Time	○
External IO Port	DI 10 / DO 4
BMS Integration ³⁾	BACnet IP / Modbus TCP
IPv6 Support	○

※ ○ : Applied, - : Not Applied
 1) Chiller Option Kit (PCHLLN000) is required
 2) It is only available in some products
 3) For the detail point list, please refer to the installation manual

Overview

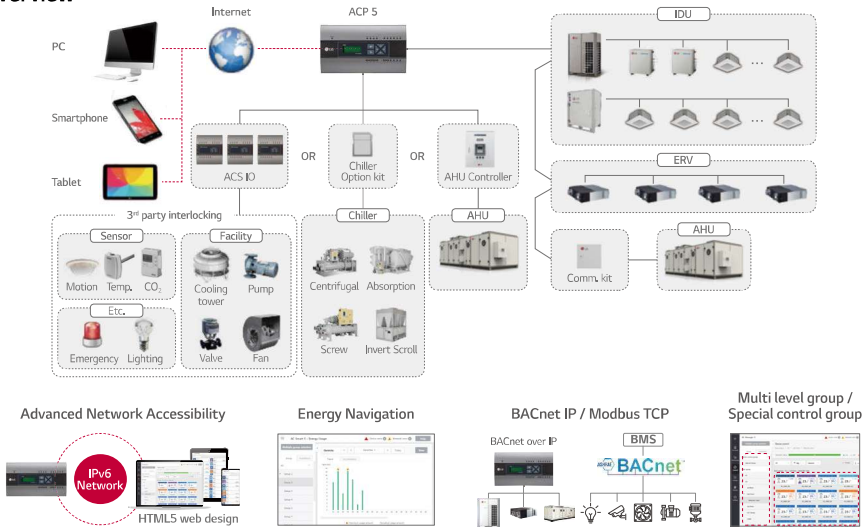

ACP LONWORKS GATEWAY

LonWorks easily link LG air conditioners and other existing building systems. By including ACP control function, the controlling continues even when error occurs with BMS.



PLNWKB000


Features & Benefit

- Connect to use Lonworks® protocol and LG air conditioner protocol.
- Process Ability (Max. connection) : Indoor unit 64EA, AHU Control Kit : Max. 16EA
- Self installation verification using interne (Web Server Included)
- Diagnosis of communication status on LG Air-conditioner network
- It offers a variety of functions as ACP which allows the customer to efficiently control various types of equipment from the customer's own Integration.

Control	Monitoring
On / Off Command	On / Off
Operation Mode Setting	Operation Mode
Lock	Lock
Temperature	Temperature
Fan Level	Fan Level
Fan Direction Auto	Fan Direction Auto
Mode Lock	Mode Lock
Fan Level Lock	Fan Level Lock
Temperature Lock	Temperature Lock
Temperature Lower Limit	Temperature Lower Limit
Temperature Higher Limit	Temperature Higher Limit
Peak Convert Cycle	Peak Convert Cycle
Peak Setting	Peak Setting
Temperature Unit	Temperature Unit
Total Temperature Lock	-
Total On / Off	-
Total Temperature	-
-	Product Type
-	Product Address
-	Current Temperature
-	Alarm
-	Power
-	Error Code
-	Peak Current Operating Percent
-	Total Accumulate Power

※ ○ : Applied, - : Not Applied

Overview

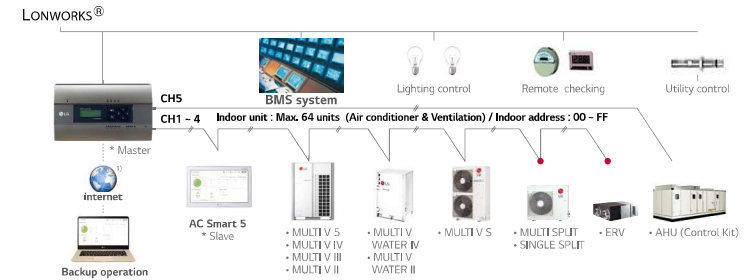

1) Assignment of public IP address is required to access central controller through internet. ● Appropriate PI 485 should be used according to PDB (Product Data Book)

PI 485

PI 485 converts LG air conditioner's protocol to the RS485 protocol for the central controller



PHNFP14A0

- Power : Connected with the Indoor Units
- 1 for Each Indoor Unit
- Indoor Unit (ERV)

AC MANAGER 5

Multiple ACP and AC Smart integration solution to manage multi sites up to 8,192 units as a single system.



PACM5A000


Features & Benefit

- Consol Type : No needs software installation and lock-key
- Max. 8,192 IDU Control
- Schedule
- Map View (Visual Navigation)
- Time limit control / Auto change over
- Energy Monitoring / Navigation
- History / Operation Trend
- Emergency stop & alarm
- Error alarm by E-mail
- Multi Language
(Eng, Ita, Spa, Por, Rus, Fra, Ger, Tur, Pol, Chi, Kor)

Model Name	PACM5A000
Size (W x H x D, mm)	270 x 155 x 65
Interfaceable Products	MULTI V / ERV / ERV DX / HYDRO KIT / THERMA V / AHU kit / LG Chiller !!
Maximum number of units	8,192 (supports 32 ACP 5 or AC Smart 5)
Individual / Group Control	On & Off / Mode / Temperature / Fan speed
Individual Controller Lock	Temperature / Mode / Fan speed / All
Error Check	○
Schedule	Weekly / Monthly / Yearly / Exception day
Web Access	○
Emergency Alarm Display	○
Power Consumption Monitoring (with PDI)	○
Auto Changeover / Setback	○
Temperature Limit	○
Operation Time Limit	○
Visual Navigation	○
Operation Trend	○
Interlock Control	○
Virtual Group Control	○
ODU Capacity Control	○
Energy Navigation (with PDI)	○

※ ○ : Applied, - : Not Applied
 1) Chiller Option Kit (PCHLLN000) is required
 Note : AC Manager 5 requires ACP 5 or AC Smart 5

Overview

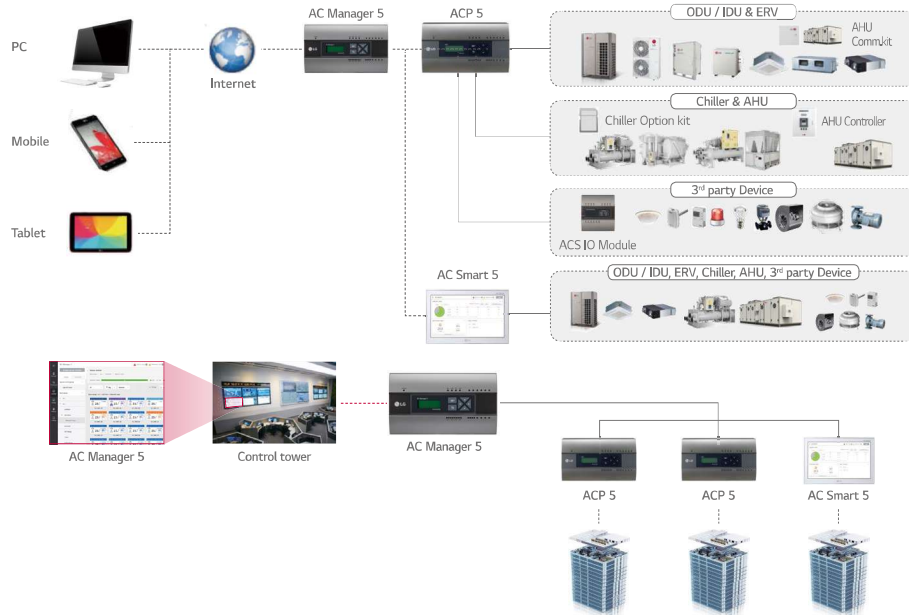

Feature

Stand-alone

Integrated with S/W program and Hardware platform, it is convenient to install since users no longer need to install program with lock-key on PC.

Up to 8,192 Connections for Indoor Units

Administrators can easily and conveniently manage a variety of LG HVAC equipment. Also, it is available to manage many buildings or areas at one place via AC Manager 5.

Advanced Network Accessibility & User Friendly GUI (reddot award)

As an advanced central controller, AC Manager 5 offers flexible interface for each user by assessing the device screen and automatically customizing the layout to provide the most optimized interface.

Energy Navigation & Energy Usage Trend




Energy navigation is the function to set the target usage amount to limit the monthly power consumption and to control so that the total accumulated power consumption does not exceed the target usage amount. It performs total of 7 control levels with the estimated/actual usage amount exceeding ratio compared to the monthly target usage amount. For the control method, there are indoor unit operation ratio, outdoor unit capacity control, and indoor unit operation control.

Peak Control

This function can reduce electricity use. There are two kinds of control logic. Energy saving effect by indoor unit operation rate control. Load management effect by outdoor unit capacity control.

Multi Level Group Composition

You can freely apply layer structure such as building, floor, zone, etc. and set the group as the same as the site composition to control and monitor the devices. Special control group You can additionally compose frequently used groups such as VIP Room, executive room, etc. regardless of the building structure.

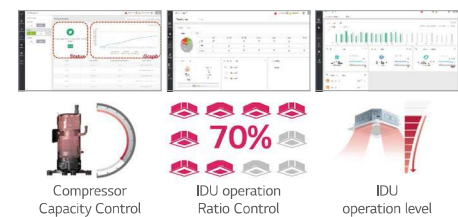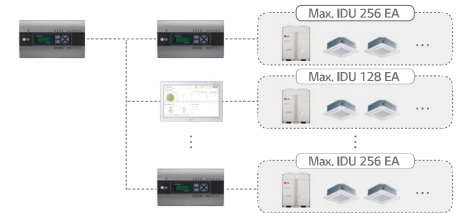

KNX GATEWAY 1)

Specially designed to allow monitoring and bidirectional control of all the parameters and functionality of LG air conditioners from KNX protocol,



Model Name	Max. Connection Indoor Units
LG-AC-KNX4	4
LG-AC-KNX8	8
LG-AC-KNX16	16
LG-AC-KNX64	64


LG-AC-KNX4 / LG-AC-KNX8
LG-AC-KNX16 / LG-AC-KNX64

Features & Benefit

- Easy installation, direct connection to all outdoor units (communication interface PMNFP14A1, when needed) and Heat recovering units (communication interface PHNFP14A0, when needed) through the RS485 Bus.
- Great integration flexibility. Using the supplied software LinkBoxEIB, a complete set of communication objects can be accessed.
- Direct connection to KNX bus
- Independent management of communications
- Power supply : 9 to 24V DC or 24V AC
- Standard DIN-Rail 6 modules enclosure
- Maximum connection unit
- LG Central controller (for example, AC Smart) and PDI can be operated with KNX gateway.


Link BoxEIB Configuration Software for IntesisBox® KNX Serious

Easy to use tool for the configuration of intesisBox, in a fast and effective way.
It offers the maximum integration possibilities with a minimal knowledge required on the system to be integrated.



- Only needed during configuration.
- One single tool for the configuration of the whole range of IntesisBox KNX series gateways.
- Supplied with IntesisBox with no additional cost.
- Configuration examples for all systems that can be integrated.
- Mapping table editable using excel, allowing a simple and fast association of KNX Group Addresses, exported from ETS, to IntesisBox's datapoints.
- Includes powerful and useful features for configuration, setup and troubleshooting.

Installation Scene

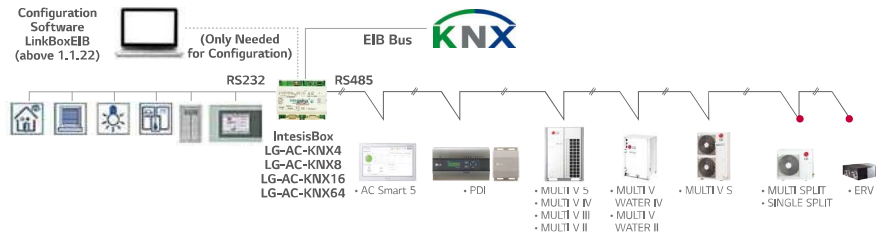

1) This product is provided by INTESIS.
• Appropriate PI 485 should be used according to PDB

MODBUS RTU GATEWAY

Providing Modbus RTU connection between LG Air conditioners and BMS.



PMBUSB0A

Features & Benefit

- Function
 - MODBUS RTU communication with MODBUS master controller
 - MODBUS RTU slave (RS485) / 9,600 bps
 - Applicable for Multi V 5
 - Size (W x H x D) : 53.6 x 89.7 x 60.7
 - Max.16 IDUs with single module / Max. 64 IDUs with 4 modules
 - Power : DC 12V

Coil Register (0 x 01)

No.	Data Bit		Function
	Air Conditioner	Ventilator	
1	Operate (On / Off)	Operate (On / Off)	0 : Stop / 1 : Run
2	Auto Swing	Aircon Operate (On / Off)	0 : Disable / 1 : Enable
3	Filter Alarm Reset	Filter Alarm Reset	0 : Normal / 1 : Reset
4	Lock Remote Controller	Lock Remote Controller	0 : UnLock / 1 : Lock
5	Lock Operate Mode	Lock Operate Mode	0 : UnLock / 1 : Lock
6	Lock Fan Speed	Lock Fan Speed	0 : UnLock / 1 : Lock
7	Lock Target Temp.	Lock Target Temp.	0 : UnLock / 1 : Lock
8	Lock IDU Address	Lock IDU Address	0 : UnLock / 1 : Lock
9	Reserved	Quick Ventilate	0 : Disable / 1 : Enable
10	Reserved	Energy Save	0 : Disable / 1 : Enable

Discrete Register (0 x 02)

No.	Data Bit		Function
	Air Conditioner	Ventilator	
10001	Connected IDU	Connected IDU	0 : Disconnected / 1 : Connected
10002	Alarm	Alarm	0 : Normal / 1 : Alarm
10002	Filter Alarm	Filter Alarm	0 : Normal / 1 : Filter Alarm

Holding Register (0 x 03)


No.	Data Bit		Function
	Air Conditioner	Ventilator	
40001	Operate Mode	Operate Mode	0 : Cooling, 1 : Dehumidifying, 2 : Fan, 3 : Auto, 4 : Heating
40002	Fan Speed	Fan Speed	1 : Low, 2 : Mid, 3 : High, 4 : Auto
40003	Target Temp.	Target Temp.	16.0 - 30.0 [°C] x 10
40004	Target Temp, Limit (Upper)	Target Temp, Limit (Upper)	16.0 - 30.0 [°C] x 10
40005	Target Temp, Limit (Lower)	Target Temp, Limit (Lower)	16.0 - 30.0 [°C] x 10
40006	Reserved	Vent, Operate Mode	0 : HEX, 1 : Auto, 2 : Normal

Input Register (0 x 04)


No.	Data Bit		Function
	Air Conditioner	Ventilator	
30001	Error Code	Error Code	0 - 255 ※ Please refer to the product error table.
30002	Room Temp.	RA Temp.	-99.0 - 99.0 [°C] x 10
30003	Pipe In Temp.	OA Temp.	-99.0 - 99.0 [°C] x 10
30004	Pipe Out Temp.	SA Temp.	-99.0 - 99.0 [°C] x 10
30005	Reserved	Pipe In Temp.	-99.0 - 99.0 [°C] x 10
30006	Reserved	Pipe Out Temp.	-99.0 - 99.0 [°C] x 10

Installation Scene

- Single module
Max. 16 indoor units with a single module



- Multiple module
Max. 64 indoor units with 4 modules in one Modbus communication line

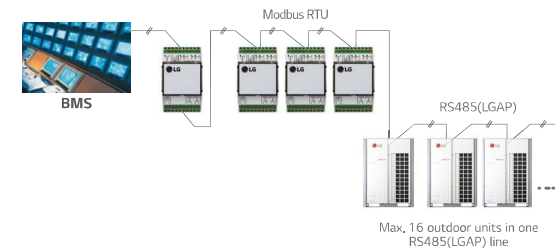

Max. 16 outdoor units in one RS485(LGAP) line

INTEGRATION DEVICE



PDI (POWER DISTRIBUTION INDICATOR)

PDI shows distributed power consumption of up to 128 indoor units





PQNUD1S40 (Premium, 8 port)
PPWRDB000 (Standard, 2 port)

Model Name	PQNUD1S40	PPWRDB000
Size (W x H x D, mm)	270 x 155 x 65	
Interfaceable Products	Air conditioner, ERV DX	
Maximum Number of Power Meters	EHP: 8 Watt meter GHP: 4 Watt meter / 4 Gas meter	EHP: 2 Watt meter GHP: 1 Watt meter / 1 Gas meter
Maximum Number of Indoor Units	MULTI V: 128	
Data Backup When Power Outage	○	
Power Input	PDI: AC 24V, Transformer: AC 220V	

※ ○ : Applied, - : Not Applied

Features & Benefit

- Total and indoor power consumption monitoring is possible.
- When connected to the LG central controller, it is possible to expand functions such as energy monitoring, energy saving operation and target usage setting.
- It is also possible to distribute gas consumption in addition to electricity.

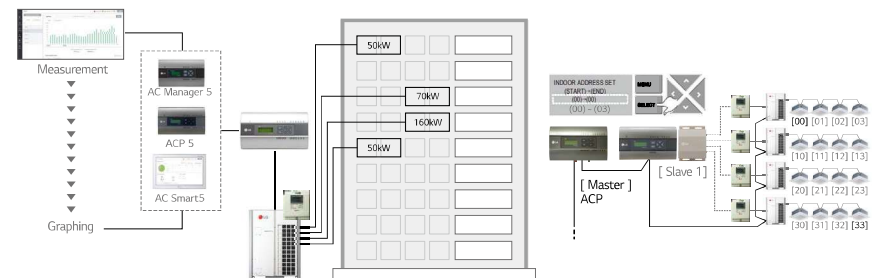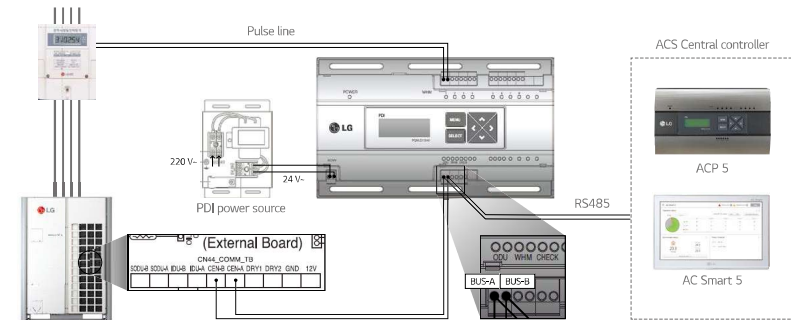

Note: 1. Power cable and type could be different from this scene depending on the Outdoor unit's specification
2. Measured power consumption could be different between PDI and Watt meter.
3. Applicable Central Controller : ACP 5, ACP Lonworks, AC Smart 5, AC Ez Touch
(Combination : we recommend to connect separated watt meter for Outdoor units to have correct power distribution value)

ACS IO MODULE

This module can be connected with ACP 5 or AC Smart 5 controller if additional I/O points such as DI/DO and AI/AO for 3rd party devices control and monitoring are needed.



PEXPMB000

Model Name		PEXPMB000
Linkable Products		
		PACS4B000 PACP4B000 PACPSA000 PACPSA000
Communication	RS-485	1 ch.
I/O	Digital Input	3 port
	Digital Output	3 port
	Universal Input ¹⁾	4 port
	Analog Output	4 port


Value Spec	Min.	Max.
Analog Input		
NTC 10k	0,68k Ω	177k Ω
PT 1000	803 Ω	1,573 Ω
Ni 1000	871,7 Ω	1,675,2 Ω
DC (Voltage)	0V	10V
DC (Current)	0mA	20mA
Analog Output	-	0V ~ 10V
Digital Input		
Binary Input (Non Voltage)	-	-
Digital Output		
Normal open	-	30VAC / 30VDC, 2A

※ ○ : Applied, - : Not Applied
1) The type of UI (Universal Input) is selectable among Digital Input and Analog Input

Features & Benefit

- Interlocking with 3rd party equipment LG Central controller can make operation scenario with 3rd party equipment by ACS IO Module.
- Control coverage is expanded.
(Air conditioner only → Sensors, Fans, Pumps, Switches--)

Key Application

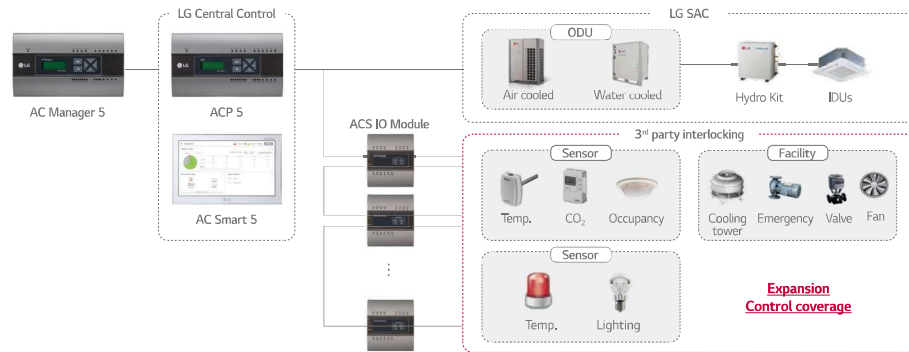

* DI : Digital Input, DO : Digital Output, UI : Universal Input, AO : Analog Output / Please contact our regional office to have connectable relay specification for analog output

ACU IO MODULE NEW

This module can be connected with ACP 5 or AC Smart 5 controller if additional I/O points such as UIO / UI / UO for 3rd party devices control and monitoring are needed.



PEXPMB300 PEXPMB200 PEXPMB100

Module Name	PEXPMB300	PEXPMB200	PEXPMB100
Linkable Products			
PACPSA000, PACP5A000			
Communication	RS-485	2 ch. ¹⁾	1 ch.
Digital Input	-	-	3port
Digital Output	2port	6port	-
Universal Input ²⁾	4port	-	6port
Analog Output	2port	4port	-

Value Spec	Min.	Max.
Analog Input		
DC (Voltage)	0V	10V
Analog Output		
DC (Voltage)	0V	10V
Digital Input		
Binary Input (Non Voltage)	-	-
Digital Output		
Normal Open	-	30VDC, 1A

※ ○ : Applied, - : Not Applied
1) 1ch is reserved for internal communication
2) The type of UI (Universal Input) is selectable among Digital Input and Analog Input

Features & Benefit

- Interlocking with 3rd party equipment LG Central controller can make operation scenario with 3rd party equipment by ACU IO Module.
- Control coverage is expanded.
(Air conditioner only → Sensors, Fans, Pumps, Switches--)

CHILLER OPTION KIT

LG central controller 5 series with Chiller Option Kit can provide LG chiller remote control and cycle monitoring.




PCHLLN000

Model Name	PCHLLN000
Monitoring Points	Evaporator status / Compressor status (Scroll, Screw, Centrifugal chiller only) / Condensor status / Generator status (Abs, chiller only)
On / Off	○
Target Temp. setting	○
Mode Change	Scroll chiller only
Schedule	○
Interfaceable Products	Scroll, Screw, Centrifugal, Absorption (LG Only)

※ ○ : Applied, - : Not Applied

Cycle Display Example

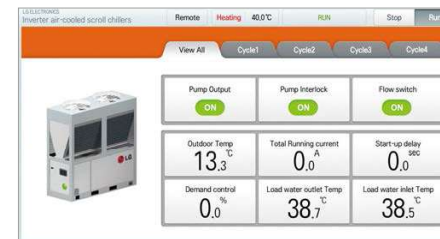

Installation Scene

- Chiller Option Kit installation of LG HVAC Solution product should be conducted by a specialized installation service engineer.
- Chiller Option Kit installation can be proceeded with a SD Card.
- The SD Card can install Chiller Option Kit in one LG HVAC Solution product.

Insert the SD Card in the LG HVAC Solution product. If a backup SD Card is inserted, replace it with a ChillerOption Kit SD Card.




DRY CONTACT

Connection between an indoor unit and external devices to control various functions.


Model Name	PDRYCB000	PDRYCB400	PDRYCB300	PDRYCB500
Case	○	○	○	○
Input Port	1	2	8	-
Comm. Protocol	-	-	-	Modbus RTU
Power	AC 220V	Connect to Indoor unit PCB (CN_CC)		
Aircon	On / Off	○	○	○
	Oper Mode	-	○	○
	Set Temp.	-	(Select & Fix)	(Select & Fix)
	Fan Speed	-	-	○
	Thermo-Off	-	(Select & Fix)	○
	Energy Saving	-	(Select & Fix)	-
Control	Lock/Unlock	-	(Select & Fix)	-
	On / Off	○	-	○
	DHW On / Off	-	-	○
AWHP	Thermo-Off	-	-	○
	Oper Mode	-	-	○
	Silent Mode	-	-	○
	Emergency Mode	-	-	○
Vent	On / Off	○	-	○
	Oper Mode	-	-	○
	Aircon Mode	-	-	○
Output	Additional Mode	-	-	○
	Fan Speed	-	-	○
	Operation Status	○	○	○
	Error	○	○	○
	Room Temp.	-	-	○

※ ○ : Applied, - : Not Applied
 Note : 1. Compatibility of PDRYCB300
 - Can use with all types of aircon indoor units after 2010 (Cassette, Ducted, Convertible, Applied PAC, Wall mounted, Console)
 - Can not use with Single package models
 - AWHP: 3 series split and monobloc models
 2. Compatibility of PDRYCB400
 - Can use with all types of aircon indoor units after 2010 (Cassette, Ducted, Convertible, Applied PAC, Wall mounted, Console)
 - Can not use with single package models
 - Can not use with AWHP Hydrokit models
 3. (Select & Fix) : This function is preset by rotary switch.

PDRYCB000

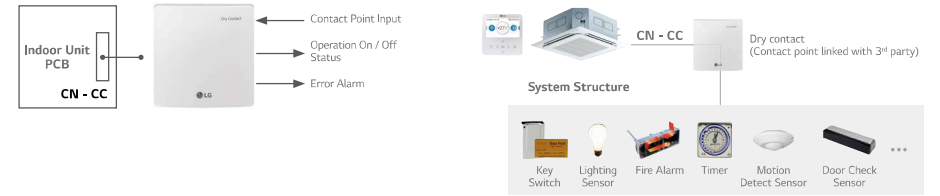


PDRYCB400

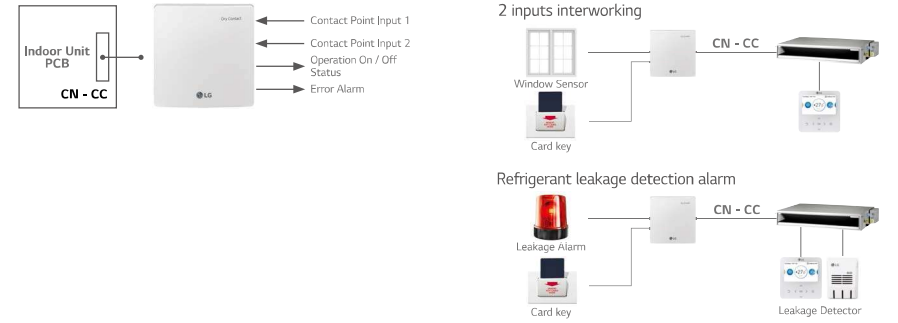

PDRYCB300



PDRYCB500

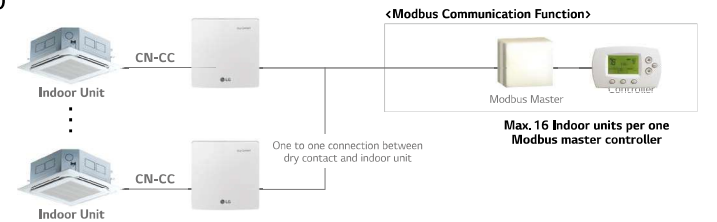

OUTDOOR UNITS
INDOOR UNITS
HOT WATER SOLUTION
VENTILATION SOLUTIONS
CONTROL SOLUTIONS
ACCESSORIES

GROUP CONTROL WIRE


Cables used to connect a wired remote controller up to 16 indoor units.



PZCWRCG3

Model Name	PZCWRCG3
Y-type Cable	0,25m Length
Long Cable	9,6m Length

Installation Scene

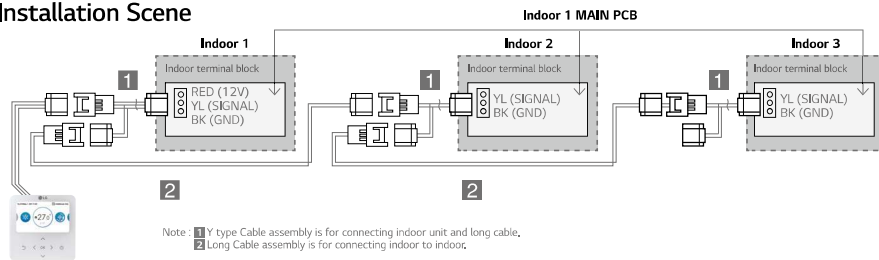

REMOTE TEMPERATURE SENSOR

Sensor for detecting the room temperature.



PQRSTA0

Features & Benefit

- It detects the exact room temperature instead of indoor unit's air temperature sensor
- Applied to Ceiling Mounted Cassette, Ceiling Concealed Duct, THERMA V and HYDRO KIT
- Extension cable (15m) is included

Installation Scene

1. Wire to the control box in the indoor unit by removing the existing thermistor and connect the extension cable its place.
2. Cut the extension cable to the appropriate length and connect the screw terminal of the remote sensor.



LOW PROFILE REMOTE TEMPERATURE BUTTON SENSOR

This installs easily and discreetly into a wall and then connects to indoor unit




ZRTBS01

Model Name	ZRTBS01	
Operation Range	-40°C to 85°C (0 to 100%RH, Non-condensing)	
Sensing Element	Thermistor	
Sensing Element Accuracy	0,2°C (0 to 70°C)	
Wire Leads	Material	Etched Teflon
	Length	15m
	Thickness	0,33mm ²
Mounting	10mm hole, push in plastic sheath with peel off tape strip	
Enclosure Material Ratings	Plastic, NEMA 1, UL94	

Features & Benefit


- Ideal for locations where aesthetics are as important as the temperature measurement.
- Inconspicuous wall sensor that mounts easily by pushing through a 10mm hole and secured with a peel off tape strip.
- Small flush sensor mounting.
- Accurate direct air measurement.
- Paintable with latex or oil base.

Key Application

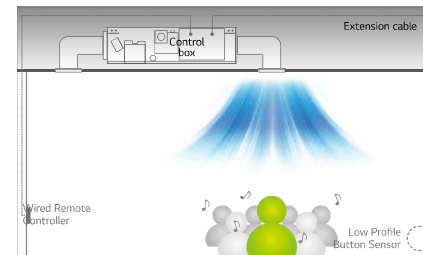


Models Applied


- LG indoor units excluding Wall-Mounted Type

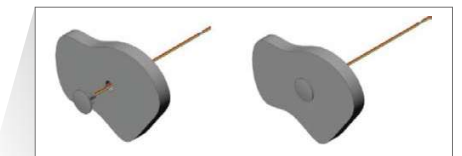

Installation Scene

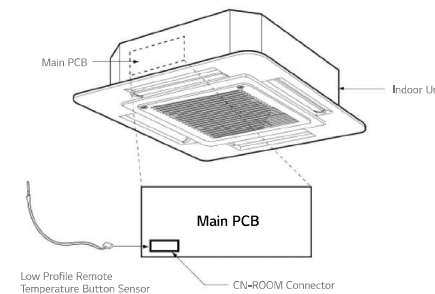


Drawing




ZONE CONTROLLER

Controls air conditioning up to 4 zones by external thermostat.



ABZCA

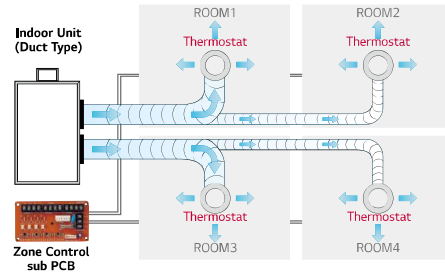


Features & Benefit

- Controls different zones (up to 4 zones) by external thermostat (AC 24V)
- Maintain proper air volume of each zone
- Auto variation of dampers
- Auto control of fan speed and On / Off operation

Models Applied

- Ceiling Concealed Duct (refer to Product Data Book for applicable models)

Wiring Diagram

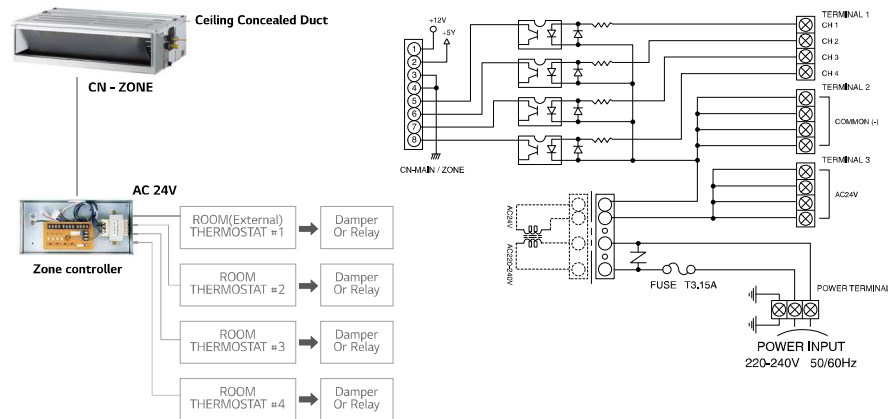

IO MODULE

Interface module between system air conditioner's outdoor unit and external device.



PVDSMN00

Features

Function

- Demand control
- Low noise operation
- Output outdoor or indoor unit operation status
- Output error status

Description

- IO Module is communication interface module for connection between MULTI V 5 and external IO (Input / Output Module) devices.


Note : IO Module is not compatible for MULTI V III

Models Applied

- MULTI V 5
- MULTI V WATER IV
- MULTI V S

Part Description


- 1) Digital Input Part (DI : Dry Contact Input)
 - Demand control by contact input (3 Step)
 - Low Noise Operation input
 - Priority Setting input : Setting the priority of demand control command (Capacity control for external signal from DDC vs Peak control by LG Central controller)
 - Open : External signal has priority to central controller (Default)
 - Close : Central controller has priority to external signal
- 2) Analog Input Part (AI : DC 0 ~ 10V)
 - Demand control by analog input (10 Step)
- 3) Digital Output Part (DO : AC 250V, Max. 1A)
 - Error status relay output
 - Operation status relay output
 - Valve control



Key Application


Demand Control

Provides variable setting for demand control according to input method to reduce power consumption. This function supports 2 types of input signal : AI (0 ~ 10V, 10 Step) and contact signal (3 Step).

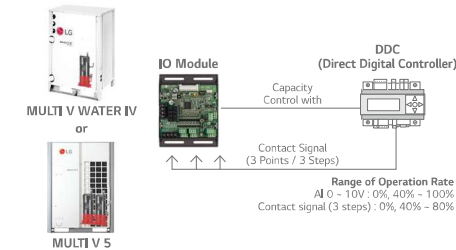


Low Noise Operation

To reduce noise level, control outdoor unit's fan speed by dry contact input.

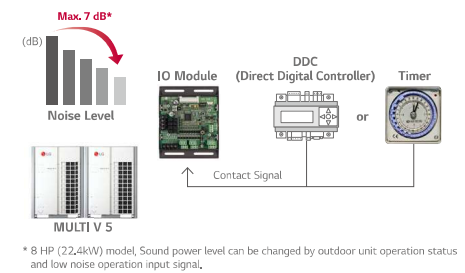

Refrigerant Leakage detection with Pump-down

For safety, IO module close refrigerant valve when Pump-down operation.

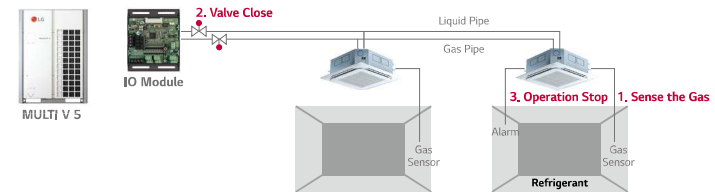

VARIABLE WATER FLOW CONTROL KIT

Accessory developed for controlling the water flow.



PWFCN000
(MULTI V WATER IV)

Features


Function

- Water pump or valve control (0 - 10V)
- Minimum output voltage setting available
- Operation, error output (AC 250V, Max. 1A)
- Dry contact input and analog output for demand control
- Digital output for operation, error status (AC 250V, Max. 1A)

Advantage

- Water flow consumption reduction
- Pump electricity consumption reduction
- Including IO Module (Dry contact input, Analog input / output, Digital output)
: Using Dry contact and variable water flow control function simultaneously


Wiring Diagram

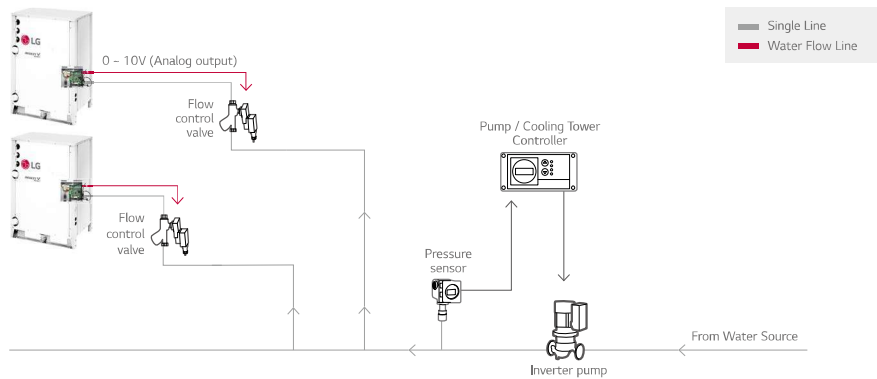

- Flow control valve : Regulates the flow or pressure of a fluid, normally responding to signals generated by independent devices.
- Flow Meter : Measures mass flow rate of a fluid traveling through a tube. (The mass flow rate is the mass of the fluid traveling past a fixed point per unit time.)
- Pressure Sensor : Measures the pressure.

LOW AMBIENT KIT

External integration module for cooling operation with -25°C low ambient temperature.



PRVC2


Features

Function

- 25°C Low ambient cooling operation by Low ambient kit and hood with damper (Analog output 0 - 10V)
- Demand control
- Low noise operation
- Output outdoor or indoor unit operation status (AC 250V, Max. 1A)
- Output error status (AC 250V, Max. 1A)

Description


- Low ambient kit supports -25° C cooling operation by making stable condensing pressure with reducing air flow rate from hood and damper control given 0 - 10V proportional to condensing pressure.
- Low ambient kit provides IO Module function.
- External snow hood and air damper are required for this item.
- Transformer and terminal block are included.

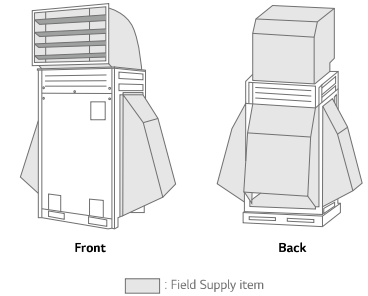

Models Applied

- MULTI V 5
- MULTI V IV

Installation Scene

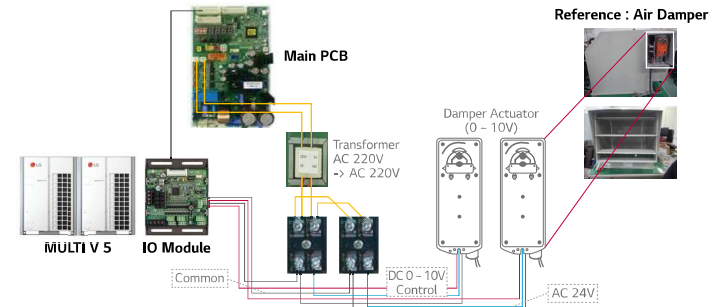

Note : The IO Module can control maximum three actuators, Please, review damper actuator's installation manual.

COOL / HEAT SELECTOR


Cooling, heating, or fan mode can be selected to prevent cooling and heating mixing errors during seasonal changes.



PRDSBM

Features


- Indoor unit mode control without central controller
- Select operation mode : Cooling, Heating, Fan mode
- Mode lock for cooling & heating mixing error-proof during the change of season

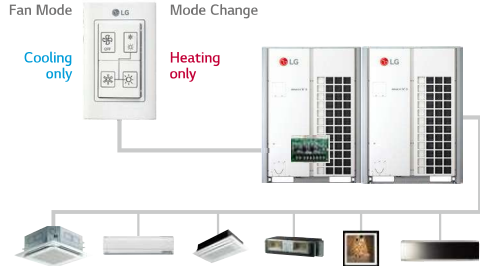

Models Applied

- MULTI V S
- MULTI V IV
- MULTI V WATER II
- MULTI V S
- MUL TI V PLUS II, MULTI V PLUS
- MULTI V WATER IV

Wiring Diagram

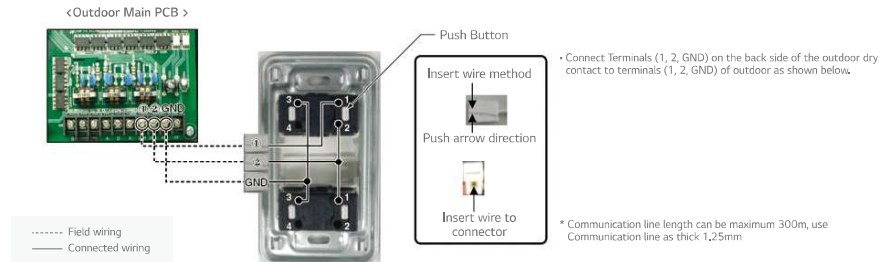

AHU KITS

A solution to connect LG's high efficiency system to the DX coil of an air handling unit for the maximum energy savings.



COMMUNICATION KIT

PAHCMR000 PAHCMS000

CONTROL KIT

PRCKD21E
PRCKD41E

EEV KIT

PRLK048A0
PRLK096A0

TXV Kit (Thermal Expansion Valve)

PATX13A0E / PATX20A0E
PATX25A0E / PATX35A0E
PATX50A0E

Specifications

Communication & Control Kit

Type	Model	Combination				Description	Dimensions (mm)		
		Outdoor Unit	EEV Kit	TXV Kit	Centralized Controller		W	H	D
Communication kit	PAHCMR000	Multi V	○	○	○	Return / Room air temperature control by DDC or LG individual / centralized controller	300	300	155
		Single Split	-	-	○				
	PAHCMS000	Multi V	○	○	○	Discharge air temperature control by DDC or LG individual / centralized controller	380	300	155
		Single Split	-	-	○				
Control kit	PRCKD21E	Multi V	-	○	○	Max capacity 1 ~ 4 master outdoor unit	600	750	285
	PRCKD41E	Multi V	-	○	○	Max capacity 5 ~ 8 master outdoor unit	600	750	285

※ ○ : Applied, - : Not Applied

Expansion Valves

Type	Model	Capacity Range	Pipe Diameter (mm)				Dimensions (mm)		
			Liquid (ODU)	Liquid (AHU)	Gas (ODU)	Gas (AHU)	W	H	D
EEV Kit (Electronic Expansion Valve)	PRLK048A0	1,3 ~ 10 HP	12,7	12,7	-	-	217	404	83
	PRLK096A0		12,7	12,7	-	-	217	404	83
TXV Kit (Thermal Expansion Valve)	PATX13A0E	8 ~ 16HP	15,88	15,88	22,22	22,22	491	238	174
	PATX20A0E		15,88	22,22	28,58	28,58	491	238	174
	PATX25A0E		22,22	28,58	34,92	34,92	491	238	174
	PATX35A0E		28,58	34,92	41,3	41,3	491	238	174
	PATX50A0E		28,58	34,92	41,3	41,3	561	291	192

※ ○ : Applied, - : Not Applied

AHU KITS

Communication Kit

HIGH ENERGY EFFICIENCY

LG's DX AHU solutions are capable of performing all indoor air conditioning tasks with success under all operating conditions thanks to their superior performance with high efficiency heat source system.

Solution benefits offer the following advantages:


- High energy efficiency inverter system
- Large range of expansion valves
 - : 1.3 – 20 HP EEV Kit, 8 – 56 HP TXV Kit
- Connected to various heat sources
 - : MULTI V, MULTI V WATER, MULTI V S, SINGLE SPLIT



DIVERSE OPTIONS FOR CONTROL

AHU communication kit can be connected to various control system such as LG individual/central controller and DDC ¹⁾. It can be directly connected to DDC without separated controller, so DDC can receive product control and monitor information through contact signal or Modbus protocol.

- LG Individual/Central controller supported
- LG controller stand alone or combination with DDC
- Direct wiring between DDC and AHU communication kit
- Embedded Digital I/O and Analog Input
- Modbus RTU protocol supported

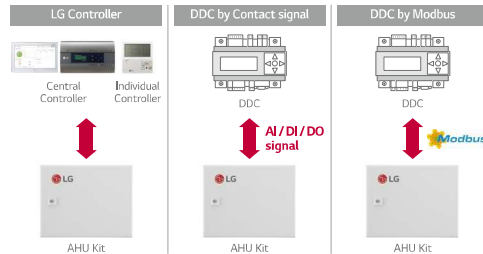


1) DDC : Direct Digital Controller

EXPANDABLE SYSTEM DESIGN

LG AHU system can be a suitable solution for various sites due to its application flexibility and wide range of line up with large capacity models. According to the required capacity, a single or multiple module combination is possible thanks to AHU communication kit's modular design.


- Multiple module combination for large capacity AHU

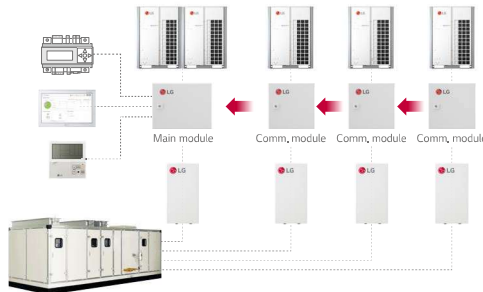

Communication Kit Application


Small Capacity with Single Split + Return / Room Air Temperature Control

- Temp. Sensors
 - Comm. Line
 - Central Comm. Line to ODU
 - Ref. Pipe
- T_E = Evaporator Temperature (Liquid Pipe / Gas Pipe)
 T_R = Return Air Temperature
 T_{ROOM} = Room Air Temperature

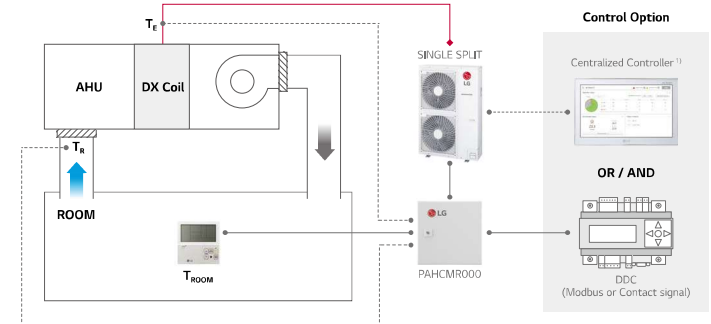

Small Capacity with Single Split + Discharge Air Temperature Control

- Temp. Sensors
 - Comm. Line
 - Central Comm. Line to ODU
 - Ref. Pipe
- T_E = Evaporator Temperature (Liquid Pipe / Gas Pipe)
 T_D = Discharge Air Temperature
 T_{ROOM} = Room Air Temperature

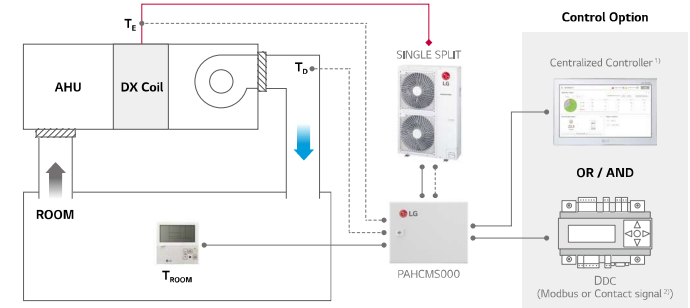

1) P1485 (PMNFP14A1) is required for centralized controller

2) In case of applying DDC with contact signal, discharge air temperature should be measured and controlled by DDC


Note : For more detail, please refer to the PDB

AHU KITS

Communication Kit Application

Small-Medium Capacity with Multi V + EEV Kit + IDU + Return / Room Air Temperature Control


- Temp. Sensors
 - Comm. Line
 - Central Comm. Line to ODU
 - Ref. Pipe
- T_E = Evaporator Temperature (Liquid Pipe / Gas Pipe)
 T_R = Return Air Temperature
 T_{ROOM} = Room Air Temperature

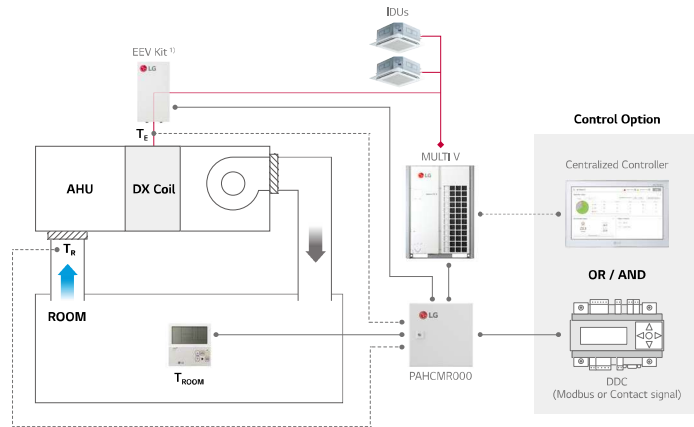

Communication Kit Application


Large Capacity with Multi V + TXV Kit + Return / Room Air Temperature Control

- Temp. Sensors
 - Comm. Line
 - Central Comm. Line to ODU
 - Ref. Pipe
- T_E = Evaporator Temperature (Liquid Pipe / Gas Pipe)
 T_R = Return Air Temperature
 T_{ROOM} = Room Air Temperature

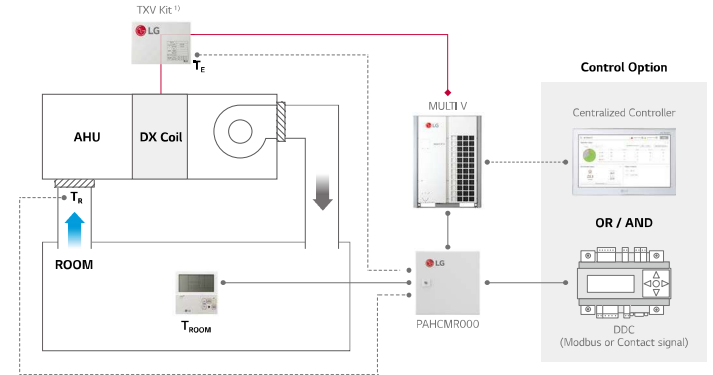


Small-Medium Capacity with Multi V + EEV Kit + Discharge Air Temperature Control

- Temp. Sensors
 - Comm. Line
 - Central Comm. Line to ODU
 - Ref. Pipe
 - Comm. Line between modules
- T_E = Evaporator Temperature (Liquid Pipe / Gas Pipe)
 T_D = Discharge Air Temperature
 T_{ROOM} = Room Air Temperature

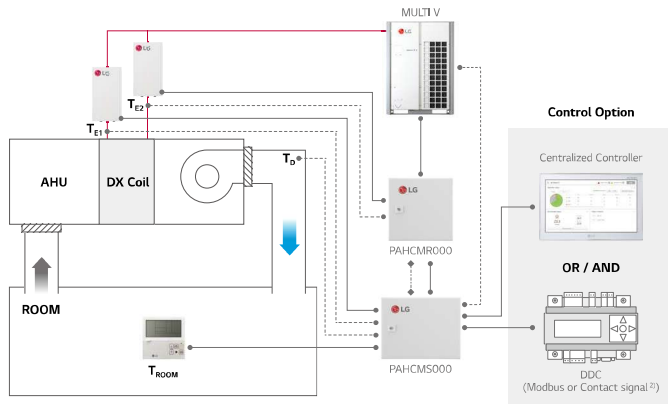

Large Capacity with Multi V + TXV Kit + Discharge Air Temperature Control

- Temp. Sensors
 - Comm. Line
 - Central Comm. Line to ODU
 - Ref. Pipe
- T_E = Evaporator Temperature (Liquid Pipe / Gas Pipe)
 T_D = Discharge Air Temperature
 T_{ROOM} = Room Air Temperature

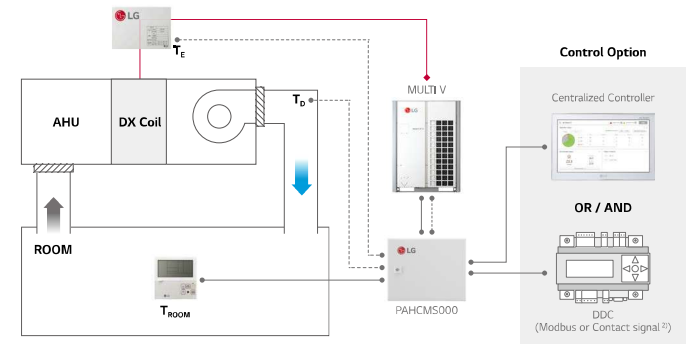

1) Multiple EEV kits can be applicable with multiple DX Coils and PAHCMR000s
 2) In case of applying DDC with contact signal, discharge air temperature should be measured and controlled by DDC
 Note : For more detail, please refer to the PDB

1) TXV Kit should be connected with outdoor unit 1:1
 2) In case of applying DDC with contact signal, discharge air temperature should be measured and controlled by DDC
 Note : For more detail, please refer to the PDB

AHU KITS

Communication Kit Function

Communication with DDC via Contact Signal

Function List	PAHCMR000	PAHCMS000	Type	Electric Spec.
Comm. Kit Operation	On / Off		Digital Input	Non voltage
Operation Mode ¹⁾	Cooling / Heating		Digital Input	Non voltage
Return (room) Air Temperature ²⁾	16 - 30°C	-	Analog Input	DC 0 - 10V / 20mA
Discharge Air Temperature ²⁾	-	-	-	-
Fan Speed ³⁾	-	Low / Middle / High	Digital Input	Non voltage
Forced Thermal On / Off	On / Off	-	Digital Input	Non voltage
Capacity Control	-	○	Analog Input	DC 0 - 10V / 20mA
Comm. Kit Operation ²⁾	On / Off		Digital Output	Max. : DC 12V / 1A, AC 250V / 3A
Operation Mode ¹⁾	-	-	-	It needs to be checked through control signal
Return (room) Air Temperature	-	-	-	-
Discharge Air Temperature	-	-	-	-
Fan Speed ³⁾	Low / Middle / High	-	Digital Output	Max. : DC 12V / 1A, AC 250V / 3A
Defrost Operation ⁴⁾	Defrost / Normal	-	Digital Output	Max. : DC 12V / 1A, AC 250V / 3A
Error Alarm ²⁾	Error / Normal	-	Digital Output	Relay C contact (Max. : DC 30V / 5A, AC 250V / 5A)
Compressor On / Off	-	On / Off	Digital Output	Max. : DC 12V / 1A, AC 250V / 3A

- ※ ○ : Applied, - : Not Applied
 1) Available operation mode can be varied depending on the setting of Communication Kit
 2) This function may not be possible depending on the setting of Communication Kit. For more details, please refer to the product data book
 3) Discharge air temperature should be controlled directly through DDC
 4) To control the fan speed using contact signal, DO ports for the status of fan speed needs to be connected with the fan unit

Communication with DDC via Modbus protocol

Function List	PAHCMR000	PAHCMS000	Note
Comm. Kit Operation	On / Off		-
Operation Mode ¹⁾	Cooling / Heating		-
Return (room) Air Temperature	16 - 30°C	-	-
Discharge Air Temperature	-	16 - 30°C	-
Fan Speed ²⁾	Low / Middle / High	-	-
Forced Thermal On / Off	-	-	-
Capacity Control	-	○	-
Comm. Kit Operation	On / Off		-
Operation Mode ¹⁾	Cooling / Heating		-
Return (room) Air Temperature	-50 - 100°C	-	Corresponding air temperature sensor connected to AHU comm. kit is required
Discharge Air Temperature	-	-50 - 100°C	-
Fan Speed	Low / Middle / High	-	-
Defrost Operation	On / Off		-
Error Alarm	Error Alarm & Code		-
Compressor On / Off	On / Off		-

- ※ ○ : Applied, - : Not Applied
 1) Available operation mode can be varied depending on the setting of Communication Kit
 2) To control the fan speed using Modbus, DO ports for the status of fan speed needs to be connected with the fan unit
 Note : For the Modbus memory map, please refer to the product data book

Communication Kit Function

With LG Control system (Individual & Centralized Controller)

Function List	PAHCMR000	PAHCMS000	Note
Comm. Kit Operation	On / Off	On / Off	-
Operation Mode ¹⁾	Cooling / Heating	Cooling / Heating	-
Return (room) Air Temperature	16 - 30°C	-	-
Discharge Air Temperature ²⁾	-	16 - 30°C	-
Fan Speed ³⁾	Low / Middle / High	-	-
Forced Thermal On / Off	-	-	-
Capacity Control	-	-	-
Comm. Kit Operation	On / Off	On / Off	-
Operation Mode ¹⁾	Cooling / Heating	Cooling / Heating	-
Return (room) Air Temperature	11 - 39.5°C / +50 - 100°C	-	By Individual controller : 11 - 39.5°C By Centralized controller : +50 - 100°C
Discharge Air Temperature	-	-50 - 100°C	Only with Centralized Controller
Fan Speed ³⁾	Low / Middle / High	-	-
Defrost Operation	On / Off	On / Off	Only with Individual Controller
Error Alarm	Error Code	Error Code	-
Compressor On / Off	On / Off	On / Off	Only with Individual Controller

- ※ ○ : Applied, - : Not Applied
 1) Available operation mode can be varied depending on the setting of Communication Kit. For more details, please refer to the product data book
 2) This range may differ depending on the type of controller
 3) To control the fan speed using contact signal, DO ports for the status of fan speed needs to be connected with the fan unit
 Note : Control function is unavailable in case of using together with DDC via contact signal

Compatibility with LG HVAC Controllers

Controller	Individual Controller			Centralized Controller				BMS Gateway	PDI	
	Premium	Standard III	Standard II	AC Ez	AC Ez Touch	AC Smart 5	ACP 5	AC Manager 5 ¹⁾	ACP Lonworks	Premium Standard
Model no.	PREMTA000 PREMTA000A PREMTA000B	PREMTB100 PREMTB910	PREMTB001	PQCSZ25050	PACEZA000	PACSSA000	PACP5A000	PACMSA000	PLNWK000	PQNUD1S40 PPWRD000
PAHCMR000	○	○	○	○	○	○	○	○	○	○
PAHCMS000	-	-	○ ²⁾	-	-	○	○	○	-	-

- ※ ○ : Applied, - : Not Applied
 1) AC Manager 5 is an integrator, so the installation with AC Smart 5 or ACP 5 is required
 2) Set temperature range of this model shall be extended in the future
 Note : 1. Dry contact for indoor unit (PDRYCB000 / 400 / 300 / 500) is not applied
 2. For more details, please refer to the product data book

AHU KITS

Communication Kit Function

Outdoor Unit Compatibility

Multi V

Model		MULTI V				MULTI V WATER			
		S	IV	III	S	IV	II	S	
AHU Controller	PAHCMR000	○	○	○	○	○	○	○	
	PAHCMS000	○	○	○	○	○	○	-	

Single Split

		Standard Inverter (1-phase)						
Capacity	Cooling kW	4,7	7,7	8,0	10,0	12,5	13,9	14,6
	Heating kW	5,5	8,0	9,0	11,0	14,0	15,4	16,9
AHU Kit	PAHCMR000	○	○	○	○	○	○	○
	PAHCMS000	○	○	○	-	-	-	-

		Standard Inverter (3-phase)					
Capacity	Cooling kW	10,0	12,5	13,9	14,6	19,0	23,0
	Heating kW	11,0	14,0	15,4	16,9	22,4	27,0
AHU Kit	PAHCMR000	○	○	○	○	○	○
	PAHCMS000	-	-	-	-	○	○

⊗ ○ : Applied, ≠ : Not Applied
 Note : 1. Table of the outdoor unit compatibility is based on European regional model.
 2. When connecting outdoor units in other areas, please check whether they are compatible or not.

Expansion valves for MULTI V system

EEV Kit	PRLK048A0										PRLK096A0					
	1,3	1,6	2	2,5	3	3,5	4	5	6	8	10	12	14	16	18	20
HP	3,6	4,5	5,6	7,1	8,2	10,6	12,3	14,1	15,8	22,4	28	33,6	39,2	44,8	50,4	56
Cooling (kW)	4	5	6,3	8	9,2	11,9	13,8	15,9	18	25,2	31,5	37,8	44,1	50,4	56,7	63
Heating (kW)																

TXV Kit	PATX13A0E				PATX20A0E				PATX25A0E				PATX35A0E				PATX50A0E			
	8 - 16	18 - 26	28 - 36	38 - 46	48 - 56	64 - 72	80 - 90	90 - 100	100 - 110	110 - 120	120 - 130	130 - 140	140 - 150	150 - 160	160 - 170	170 - 180	180 - 190	190 - 200		
HP	22,4 - 44,8	50,4 - 72,8	78,4 - 100,8	106,4 - 128,8	134,4 - 156,8															
Cooling (kW)	25,2 - 50,4	56,7 - 81,9	88,2 - 112,1	118,4 - 143,6	148,5 - 175,1															
Heating (kW)																				

* Capacities are based on the following conditions :
 - Cooling : Indoor 27°C (80,6°F) DB / 19°C (66,2°F) WB Outdoor 35°C (95°F) DB / 24°C (75,2°F) WB
 Condensing temperature (tc) 46°C, Evaporating temperature (te) 6°C
 - Heating : Indoor 20°C (68°F) DB / 15°C (59°F) WB Outdoor 7°C (44,6°F) DB / 6°C (42,8°F) WB
 Hot gas inlet temperature 70°C, Condensing temperature (tc) 46°C
 - Piping Length : Interconnected Pipe Length = 7,5m
 - Difference Limit of Elevation (Outdoor - Indoor Unit) is zero

Control Kit

List	Required Item
Heating / Cooling	SA / RA temperature sensor (or SA / RA temperature & humidity sensor)
Automatic Ventilation	SA / RA temperature, CO ₂ sensor, Damper actuator (OA, EA, MA)
Energy Saving (Cooling Mode Only)	SA temperature, OA / RA temp&humidity sensor, Damper actuator (OA, EA, MA)
Humidification	SA temperature, RA temperature & humidity sensor, Humidifier
Inverter Fan Control	SA / RA temperature, Static pressure sensor, Inverter driver for fan control
Filter Alarm	Difference pressure sensor
Smoke Detecting	Smoke detection sensor


RA : Return Air, EA : Exhaust Air, OA : Outdoor Air, SA : Supply Air, MA : Mix air (RA + OA)

Field Supplied Item

List	Required Specification	Apply Location
Temperature Sensor	- Power : AC 24V, Output signal : DC 0 - 10V - Temperature boundary : -50 - 50°C	- Apply to MA, SA, RA
Temperature & Humidity Sensor	- Power : AC 24V, Output signal : DC 0 - 10V - Temperature boundary : -40 - 70°C - Humidity boundary : 0 - 95% RH	- Apply to SA, RA, OA - Can not be applied to MA
Damper Actuator	- Power : AC 24V, Output signal : DC 0 - 10V - Torque : 15 Nm, Operation time : 150sec. - Rotation angle : 90°	- Apply to OA, EA, MA damper
Difference Pressure Sensor (for Filter)	- Power : AC 24V, Output signal : DC 0 - 10V * Boundary : 0 - 1000Pa - Switch type : Relay Open / Close	- Apply to filter
Static Pressure Sensor	- Power : AC 24V, Output signal : DC 0 - 10V - Boundary : 0 - 1000pa	- Apply to SA (for inverter control)
CO ₂ Sensor	- Power : AC 24V, Output signal : DC 0 - 10V - Boundary : 0 - 2000ppm	- Apply to RA duct
Smoke Detection Sensor	- Power : AC 24V, From : Contact point type	- Apply to RA duct

Note : Boundary of specification can be changed through LGAV software. However, please make a specification referring to the above table

Various Control with Control kit – Multiple MULTI V + TXV Kits

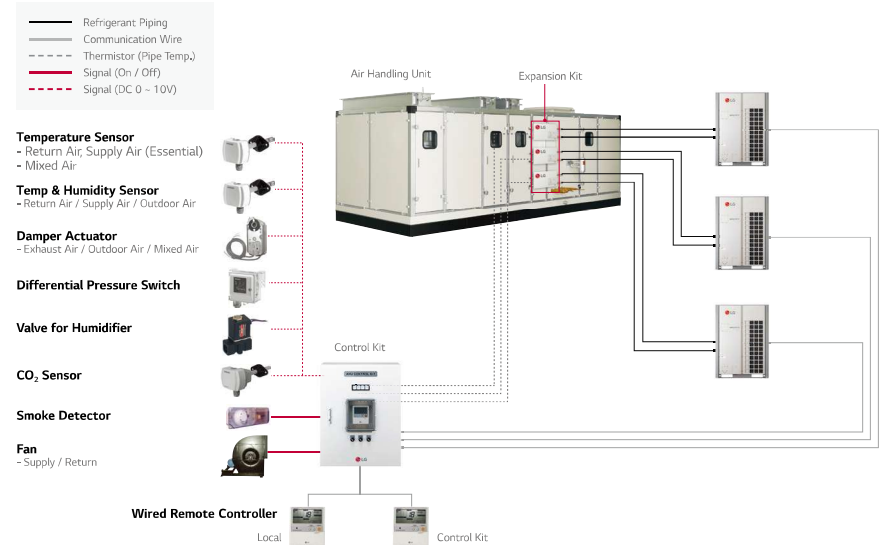

HOTEL

Hotel Control Solution

Guest Rooms

- The air conditioner automatically turn off when guests leave
- Integrated control of air conditioner with the hotel room controller
- Control the air conditioner with an existing hotel thermostat
- Guest safety is the first priority

Reception

- Air conditioner control in conjunction with check-in or check out

Public Areas

- Centralized management of the public areas

- Dry contact
- Dry contact
- Dry contact for thermostat
- Refrigerant Leak detector
- AC Smart 5 (Scheduling)

Hotel Proposal / Design

Guest Room				Lobby	
<p>The air conditioner automatically turn off when guests leave</p> <p>PDRYCB400 2 contact point</p> <p>Input</p> <ul style="list-style-type: none"> Operation On / Off <p>Output</p> <ul style="list-style-type: none"> Operation On / Off status Error alarm 	<p>Integrated control of air conditioner with the hotel room controller</p> <p>PDRYCB500 Modbus RTU(9,600bps)</p> <p>Function</p> <ul style="list-style-type: none"> Operation Indoor temperature Error alarm Set run mode Set temperature Set fan speed 	<p>Control with existing hotel thermostat</p> <p>PDRYCB300 8 contact point</p> <p>Input</p> <ul style="list-style-type: none"> Operation On / Off Thermo On / Off Operation mode (Fan / Heat / Cool) Fan speed (Low / Middle / High) <p>Output</p> <ul style="list-style-type: none"> Operation On / Off status Error alarm 	<p>Guest safety is the first priority</p> <p>PRLDNV50 Refrigerant leakage detector</p> <ul style="list-style-type: none"> 6000ppm <p>PREMTB100 Wired remote controller</p> <ul style="list-style-type: none"> 4,3 inch color LCD Touch button 	<p>Air conditioner control in conjunction with check-in or check out</p> <p>PACS5A000 AC Smart 5</p> <ul style="list-style-type: none"> BMS Integration (BACnet IP, Modbus TCP) <p>PACP5A000 ACP 5</p> <ul style="list-style-type: none"> BMS Integration (BACnet IP, Modbus TCP) 	<p>AC Smart 5 (Scheduling)</p>

SHOPPING MALL

Shopping Mall Control Solution

Retail

- Rationally distribute and manage the power consumption by tenants
- Fast problem detection and alarms

Maintenance Office

- Reduces energy by checking operational trends

Atrium

- Integrated management of AHU applied to large spaces
- Chiller and VRF integrated control

- PDI
- Central controller (Operation trend)
- Central controller (Operation trend)
- Comm. kit
- Central controller (Operation trend) + Chiller option kit

Shopping Mall Reference

Retail		Maintenance Office	Atrium	
<p>Rationally distribute and manage power consumption by the tenant</p> <p>PPWRB000 PDI Standard (2 port)</p> <ul style="list-style-type: none"> Max, 128 IDU <p>PQNUD1S40 PDI Premium (8 port)</p> <ul style="list-style-type: none"> Max, 128 IDU 	<p>Fast problem detection and alarms</p> <p>PACS5A000 AC Smart 5</p> <ul style="list-style-type: none"> BMS Integration (BACnet IP, Modbus TCP) <p>PACP5A000 ACP 5</p> <ul style="list-style-type: none"> BMS Integration (BACnet IP, Modbus TCP) 	<p>Reduces energy by checking operational trends</p> <p>PAHCMR000 AHU Comm. Kit</p> <ul style="list-style-type: none"> Return air <p>PAHCM5000 AHU Comm. Kit</p> <ul style="list-style-type: none"> Discharge air 	<p>Integrated management of AHU applied to large spaces</p> <p>PCHLLN000 Chiller option kit</p> <p>Chiller option kit (S/W)</p> <p>PACS5A000 ACP 5</p> <p>PACS5A000 AC Smart 5</p>	<p>Chiller and VRF integrated control</p>

HOSPITAL

Hospital Control Solution

Hospital Ward

- Proper airflow management for patients
- Monitor the comfort level for each hospital ward
- Control fan speed and air volume

Service Zone

- Energy savings based on flexible scheduling

Lobby

- Centralized management of AHU for large spaces

Hospital Proposal / Design

Hospital Ward			Service Zone	Lobby
Proper airflow management for patients	Monitor the comfort level for each hospital ward	External device interlock control	Energy savings based on flexible scheduling	Centralized management of AHU for large space
PTVSMMAO Human detection sensor	PACSA000 AC Smart 5	PDRYCB400 2 contact point	PACSA000 AC Smart 5	PAHCRM000 AHU Comm. Kit
		Input • Operation On / Off		
PREMTB100 Wired remote controller	PACP5A000 ACP 5	Output • Operation On / Off status • Error alarm	PACP5A000 ACP 5	PAHCM5000 AHU Comm. Kit
• 4.3 inch color LCD • Touch button	• BMS Integration (BACnet IP, Modbus TCP)		• BMS Integration (BACnet IP, Modbus TCP)	• Return air
			• BMS Integration (BACnet IP, Modbus TCP)	• Discharge air

EDUCATION

Education Control Solution

Class Room

- Automatically save energy in the absence of students
- Central controls prevent students from arbitrary control

Lecture Room

- Schedule management according to academic plan

Maintenance Office

- Integrated management of distributed buildings
- Centralized management with multiple interfaces

Education Proposal / Design

Class Room	Lecture Room	Maintenance Office
Automatically save energy in the absence of students	Schedule management according to academic plan	Integrated management of distributed buildings
PTVSMMAO Human detection sensor	PACSA000 AC Smart 5	PACM5A000 AC Manager 5
PREMTB100 Wired remote controller	PACP5A000 ACP 5	PACM5A000 AC Manager 5
• 4.3 inch color LCD • Touch button	• BMS Integration (BACnet IP, Modbus TCP)	• BMS Integration (BACnet IP, Modbus TCP)

OUTDOOR UNITS
 INDOOR UNITS
 HOT WATER SOLUTION
 VENTILATION SOLUTIONS
 CONTROL SOLUTIONS
 ACCESSORIES

OFFICE

Office Control Solution

<p>Maintenance Office</p> <p>Energy savings and management throughout the building</p> <p>Integrated management of HVAC with BMS system</p> <p>Reduce costs by replacing BMS</p>	<p>Central controller (Energy Hawk)</p> <p>Central controller (BMS Gateway)</p> <p>Central controller (Operation trend) + ACS IO Module</p>
<p>Office Room</p> <p>Reasonable power distribution to tenants</p>	<p>PDI</p>
<p>Server Room</p> <p>Main equipment 24 hours back up management</p>	<p>Central controller (Redundant)</p>
<p>Meeting Room</p> <p>Energy savings based on occupancy detection</p>	<p>Wired remote controller</p>

Office Proposal / Design

Maintenance Office	Office Room	Server Room	Meeting Room
<p>Energy savings and management throughout the building</p> <p>Integrated management of HVAC with BMS system</p> <p>Reduce costs by replacing BMS</p>	<p>Reasonable power distribution to tenants</p>	<p>Main equipment 24 hours back up management</p>	<p>Energy savings based on occupancy detection</p>
<p>Target</p> <p>Forecasting</p> <p>BMS Protocol</p> <p>BMS System</p>	<p>WHM (Watt-Hour Meter)</p> <p>Pulse signal</p> <p>Power 100 kWh</p> <p>PDI</p>	<p>Error</p> <p>24</p> <p>Human detection sensor</p>	<p>Human detection sensor</p>
<p>PAC55A000</p> <p>AC Smart 5</p> <p>• BMS Integration (BACnet IP; Modbus TCP)</p>	<p>PLNWK000</p> <p>LonWorks gateway</p>	<p>PAC55A000</p> <p>AC Smart 5</p> <p>• BMS Integration (BACnet IP; Modbus TCP)</p>	<p>PTV5MA0</p> <p>Human detection sensor</p>
<p>PAC5A000</p> <p>ACP 5</p> <p>• BMS Integration (BACnet IP; Modbus TCP)</p>	<p>PMBUS00A</p> <p>Modbus RTU gateway</p>	<p>PAC5A000</p> <p>ACP 5</p> <p>• BMS Integration (BACnet IP; Modbus TCP)</p>	<p>PREMTB100</p> <p>Wired remote controller</p> <p>• 4.3 inch color LCD</p> <p>• Touch button</p>
<p>PEXPMB000</p> <p>ACS IO Module</p>	<p>PPWRDB000</p> <p>PDI Standard (2 port)</p> <p>• Max, 128 IDU</p>	<p>PEXP5A000</p> <p>ACP 5</p>	<p>PREMTB100</p> <p>Wired remote controller</p> <p>• 4.3 inch color LCD</p> <p>• Touch button</p>
<p>PEXP300</p> <p>PEXP200</p> <p>PEXP100</p> <p>ACU IO Module</p>	<p>PQNUD1S40</p> <p>PDI Premium (8 port)</p> <p>• Max, 128 IDU</p>	<p>PAC5A000</p> <p>ACP 5</p>	<p>PREMTB100</p> <p>Wired remote controller</p> <p>• 4.3 inch color LCD</p> <p>• Touch button</p>

RESIDENTIAL

Residential Control Solution

<p>Home</p> <p>Control your home air conditioner anytime, anywhere</p>	<p>Wi-Fi Modem</p>
<p>Living Room</p> <p>Build a smart house</p>	<p>Modbus RTU</p>
<p>Bed Room</p> <p>Use a familiar residential thermostat</p> <p>Simple interlocking control by remote control</p>	<p>Dry contact (For thermostat)</p> <p>Wired remote controller</p>
<p>Apartment / Residence</p> <p>Stable system operation</p>	<p>Independent power module</p>

Residential Proposal / Design

Home	Living Room	Bed Room	Apartment
<p>Control your home air conditioner anytime, anywhere</p>	<p>Build a Smart house</p>	<p>Use a familiar residential thermostat</p> <p>Simple interlocking control by remote control</p>	<p>Stable system operation when indoor unit power is lost</p>
<p>Wi-Fi Modem</p>	<p>Smart Home</p>	<p>Thermostat</p> <p>Lighting</p> <p>Fans</p> <p>Radiator</p>	<p>Power Module</p>
<p>PWFMD200</p> <p>LG Wi-Fi modem</p>	<p>PDRYCB500</p> <p>Modbus RTU (9,600bps)</p>	<p>PDRYCB300</p> <p>8 contact point</p>	<p>PRIPO</p> <p>Independent power module</p> <p>• EEV full close function</p>
<p>Function</p> <ul style="list-style-type: none"> • On / Off • Fan speed • Operation mode • Vane control • Reservation (Sleep, Weekly On / Off) • Error check 	<p>Function</p> <ul style="list-style-type: none"> • Operation • Indoor temperature • Error alarm • Set operation mode (Fan / Heat / Cool) • Set temperature • Set fan speed 	<p>Input</p> <ul style="list-style-type: none"> • Operation On / Off • Thermo On / Off • Operation mode (Fan / Heat / Cool) • Fan speed (Low / Middle / High) <p>Output</p> <ul style="list-style-type: none"> • Operation On / Off status • Error alarm 	<p>Input</p> <ul style="list-style-type: none"> • 4.3 inch color LCD • Touch button

OUTDOOR UNITS
 INDOOR UNITS
 HOT WATER SOLUTION
 VENTILATION SOLUTIONS
 CONTROL SOLUTIONS
 ACCESSORIES